

NON-RETURN VALVE 654



WITT non-return valves for reliable protection against dangerous reverse gas flow. Every non-return valve 100% tested.

Benefits

- a spring loaded non-return valve prevents back feeding of gases which could lead to unwanted gas mixtures
- low pressure drops – using complex valve assembly with low opening pressures (approx. 30 mbar)
- no leaks – using of a spring loaded valve assembly with elastomer sealing
- diverse applications – useful for many technical gases
- reduce installation costs – the spring loaded valve is not affected by gravity and may be installed in any orientation
- compact design, small mounting dimensions

Operation / Usage


- non-return valves are used to protect equipment and pipelines against dangerous reverse gas flow
- WITT non-return valves may be mounted in any position / orientation
- the maximum ambient / working temperature is 70 °C / 158 °F

Maintenance

- annual testing of the non-return valve and body leak tightness is recommended
- WITT is happy to supply special test equipment
- non-return valves are only to be serviced by the manufacturer

654-ES

654

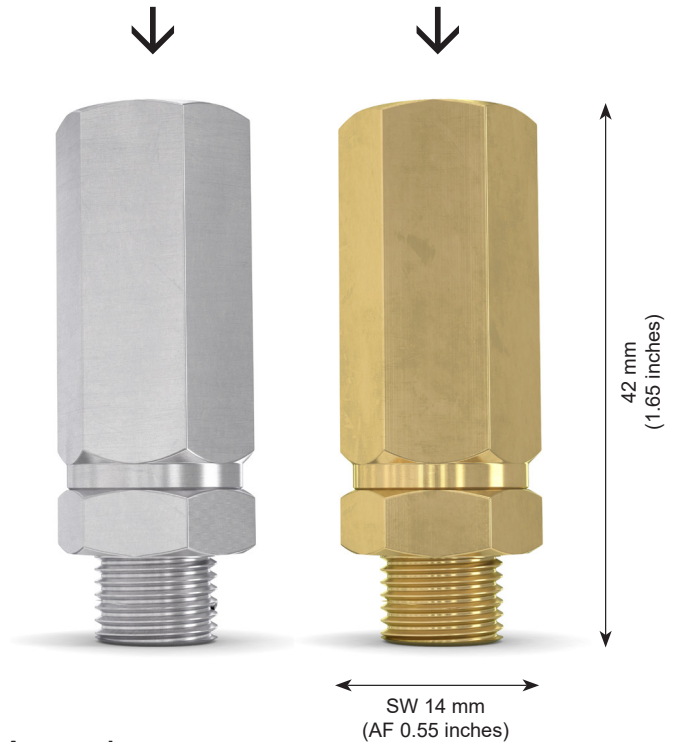

Approvals

Company certified according to ISO 9001 and PED 2014/68/EU Module H


Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems

Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service

Model	Max. working pressure [bar]	Seal-Material	Housing-Material	Weight [g]	Connection [inch]	Order-No.	
654	Ethylene (E) LPG (P) Natural gas (M) Town gas (C) Hydrogen (H)	Elastomer CR	Brass CuZn39Pb3	39	G 1/8 RH	120003037	
	Oxygen (O) Compressed air (D)						
	Ethylene (E) LPG (P) Natural gas (M) Town gas (C) Hydrogen (H)						Elastomer FPM
	Oxygen (O) Compressed air (D)						
654-ES	Ethylene (E) LPG (P) Natural gas (M) Town gas (C) Hydrogen (H)	Elastomer NBR	Stainless steel 4.4305	39	G 1/8 RH	120403033	
	Oxygen (O) Compressed air (D)						

Other gases or connections available on request

654

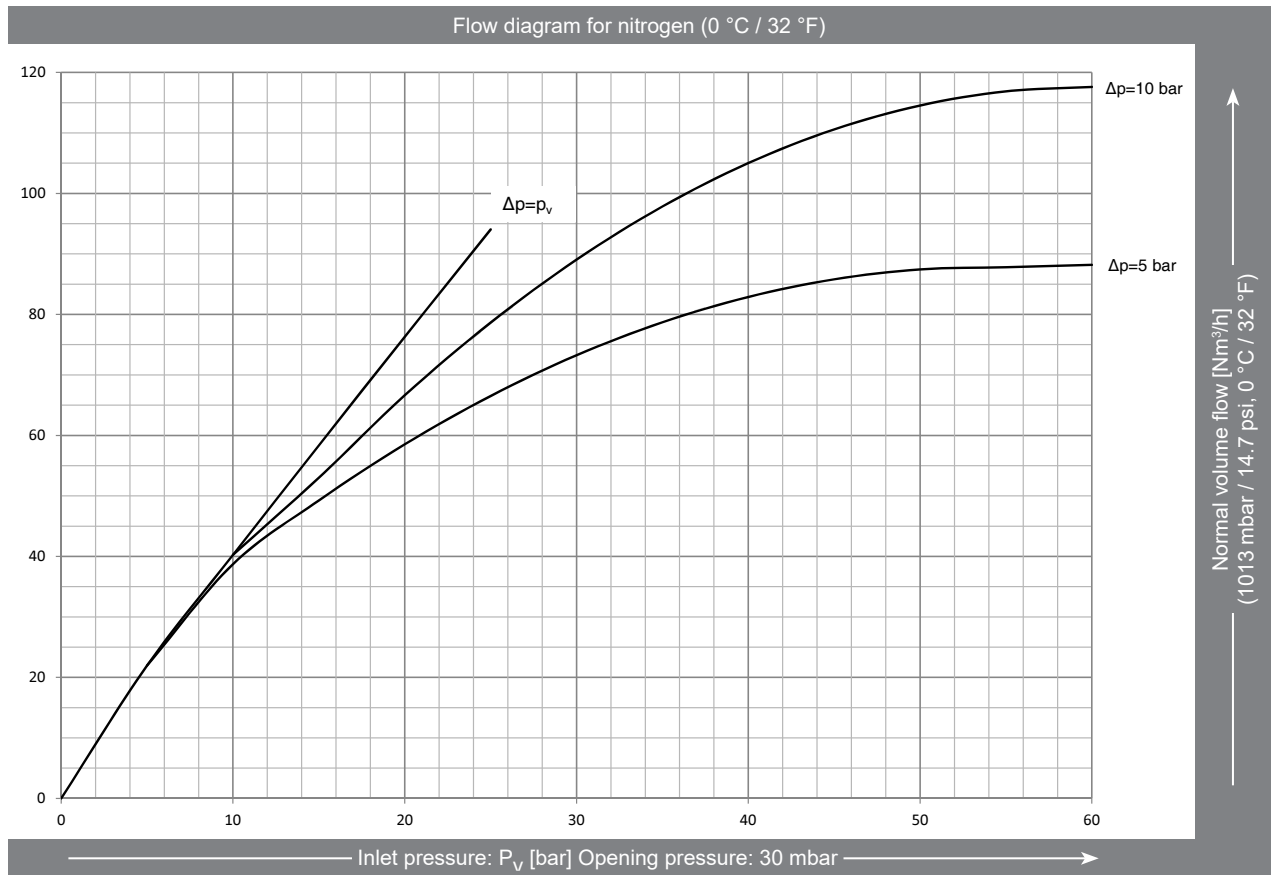

Conversion factors:

Natural gas	x 1.25
Ethylene	x 1.02
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75