



PHOTOSWITCH Series 9000 On/Off and Timing Photoelectric Sensors

Catalog Number 42G

Specifications

Table 1 - All Photoelectric Sensors

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam			Fiber-optic	
							Source (1)		Receiver	Plastic Visible Red	Glass Infrared
Sensing distance	9.1 m (30 ft) (2)	4.9 m (16 ft) (2)	1.2 m (4 ft)	1.5 m (5 ft)	3.0 m (10 ft)	4.2 m (14 ft)	61 m (200 ft)	152 m (500 ft)	Depends on light source selected	Depends on fiber-optic selected	
	3.6 m (12 ft) (3)	2 m (6.5 ft) (3)									
	3 m (10 ft) (4)	1 m (3 ft) (4)									
Transmitting status indicator	Visible Red 660 nm	Visible Red 660 nm	Visible Red 660 nm	Infrared 880nm	Infrared 880nm	Infrared 880nm	Infrared 880nm	Infrared 880nm	-	Visible Red 660 nm	Infrared 880nm
Indicators	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP (5)	Yellow: Power Green: Output Red: Margin/SCP			Yellow: Power Green: Output Red: Margin/SCP	
Field of view	1.5°	1.5°	1.5°	3.5°	6.5°	3.5°	1.5°	1.5°	1.5°	Depends on fiber-optic selected	
Sensitivity adjustment	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer	Single-turn Potentiometer
Operating temperature	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)	-34...+70 °C (-29...+158 °F) (6)
Relative humidity	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%	5...95%
Housing/lens material	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic	Valox/acrylic
Operating environment	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67	NEMA 3, 4X, 6P, 12, 13, IP67
Approvals	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives	UL Listed CSA certified CE marked for all applicable directives			UL Listed CSA certified CE marked for all applicable directives	
Protections	All Versions: False Pulse	All Versions: False Pulse	All Versions: False Pulse	All Versions: False Pulse	All Versions: False Pulse	All Versions: False Pulse	All Versions: False Pulse			All Versions: False Pulse	
	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload	Solid-state output versions: Short circuit and overload			Solid-state output versions: Short circuit and overload	
	DC versions: Reverse polarity	DC versions: Reverse polarity	DC versions: Reverse polarity	DC versions: Reverse polarity	DC versions: Reverse polarity	DC versions: Reverse polarity	DC versions: Reverse polarity			DC versions: Reverse polarity	
Vibration	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2			10...55 Hz 1 mm (0.04 in.) amplitude Meets or exceeds IEC 947-5-2	
Shock	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2			30G with 1 ms pulse duration Meets or exceeds IEC 947-5-2	

(1) Transmitted beam source rated 10...264V AC/DC.

(2) 78 mm (3 in.) reflector

(3) 32 mm (1.25 in.) reflector

(4) 16 mm (0.625 in.) reflector

(5) Red: Illuminates when margin ≤0.5x (no target) and ≥2.5x (target).

(6) Except models with solid-state and relay output (see page 8).

Table 2 - 10...30V DC Photoelectric Sensors – NPN and PNP

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam			Fiber-optic	
							Source (1)		Receiver	Plastic Visible Red	Glass Infrared
Cat. No. 2 m (9.84 ft) 300V cable	42GxU-9000 (2)	42GxU-9200	42GxC-9200 (2)	42GxP-9000 (3)	42GRP-9040	42GRP-9070	42GRL-9000	42GRL-9040	42GxR-9000 (2)	42GxF-9100 (2)	42GxF-9000 (2)
Cat. No. 4-pin DC micro QD	42GxU-9000-QD (2)	42GxU-9200-QD (2)	42GxC-9200-QD (2)	42GxP-9000-QD (3)	42GRP-9040-QD	42GRP-9070-QD	42GRL-9000-QD	42GRL-9040-QD	42GxR-9000-QD (2)	42GxF-9100-QD (2)	42GxF-9000-QD (2)
Cat. No. 4-pin micro QD	42GxU-9000-QD1 (2)	42GxU-9200-QD1 (2)	42GxC-9200-QD1 (2)	42GxP-9000-QD1 (3)	42GRP-9040-QD1	42GRP-9070-QD1	42GRL-9002-QD	42GRL-9042-QD	42GxR-9000-QD1 (2)	42GxF-9100-QD1 (2)	42GxF-9000-QD1 (2)
Supply current	30 mA	30 mA	30 mA	30 mA	30 mA	50 mA	15 mA	15 mA	25 mA	30 mA	30 mA

Table 2 - 10...30V DC Photoelectric Sensors – NPN and PNP (Continued)

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam		Fiber-optic	
							Source (1)	Receiver	Plastic Visible Red	Glass Infrared
Output energized	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	–	–	Light/dark selectable	Light/dark selectable
Load current	250 mA (4)	250 mA (4)	250 mA (4)	250 mA (4)	250 mA (4)	250 mA	–	–	250 mA	250 mA
Leakage current	10 µA	10 µA	10 µA	10 µA	10 µA	10 µA	–	–	10 µA	10 µA
Power consumption	4VA max	4VA max	4VA max	4VA max	4VA max	4VA max	4VA max	4VA max	4VA max	4VA max
Response time	2 ms (5)	2 ms (5)	2 ms (5)	2 ms (5)	2 ms	2 ms	–	–	5 ms	2 ms

- (1) Transmitted beam source rated 10...264V AC/DC.
- (2) x = R: On/Off, or T: timer version.
- (3) x = L: Linear sense potentiometer, S: Teachable version, R: Nonlinear sense potentiometer, or T: Timer version.
- (4) 100 mA for 42GSP, 9000, and 42GLP-9000 models.
- (5) 5 ms for timer versions.

Table 3 - 10...55V DC/20...40V AC Photoelectric Sensors – SPDT EM Relay

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam		Fiber-optic	
							Source (1)	Receiver	Plastic Visible Red	Glass Infrared
Cat. No. 2 m (9.84 ft) 300V cable	42GxU-9001 (2)	42GxU-9201 (2)	–	42GxP-9001 (2)	42GRP-9041	–	–	42GRR-9001	42GxF-9101 (2)	42GxF-9001 (2)
Cat. No. 5-pin micro QD	42GxU-9001-QD (2)	42GxU-9201-QD (2)	–	42GxP-9001-QD (2)	42GRP-9041-QD	–	–	42GRR-9001-QD	42GxF-9101-QD (2)	42GxF-9001-QD (2)
Supply current	40 mA	40 mA	–	40 mA	40 mA	–	–	35 mA	40 mA	
Output energized	Light/dark selectable	Light/dark selectable	–	Light/dark selectable	Light/dark selectable	–	–	Light/dark selectable	Light/dark selectable	
Load current	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	–	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	–	–	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	
Leakage current	–	–	–	–	–	–	–	–	–	
Power consumption	2.2 watts/ 1.6VA max	2.2 watts/ 1.6VA max	–	2.2 watts/ 1.6VA max	2.2 watts/ 1.6VA max	–	–	–	3VA max	
Response time	15 ms (3)	15 ms (3)	–	15 ms (3)	15 ms	–	–	23 ms	15 ms	

- (1) Transmitted beam source rated 10...264V AC/DC.
- (2) x = R: On/Off, or T: timer version.
- (3) 18 ms for timer versions.

Table 4 - 70...264V DC/60...264V AC Photoelectric Sensors – SPDT EM Relay

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam		Fiber-optic	
							Source (1)	Receiver	Plastic Visible Red	Glass Infrared
Cat. No. 2 m (9.84 ft) 300V cable	42GxU-9002 (2)	42GxU-9202 (2)	42GxC-9202 (2)	42GxP-9002 (2)	42GRP-9042	42GRP-9072	–	42GxR-9002 (2)	42GxF-9102 (2)	42GxF-9002 (2)
Cat. No. 5-pin micro QD	42GxU-9002-QD (2)	42GxU-9202-QD (2)	42GxC-9202-QD (2)	42GxP-9002-QD (2)	42GRP-9042-QD	42GRP-9072-QD	–	42GxR-9002-QD (2)	42GxF-9102-QD (2)	42GxF-9002-QD (2)
Supply current	15 mA	15 mA	15 mA	15 mA	15 mA	15 mA	–	10 mA	15 mA	
Output energized	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	–	Light/dark selectable	Light/dark selectable	
Load current	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	–	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	–	–	2A/132V AC 1A/264V AC 1A/150V DC	2A/132V AC 1A/264V AC 1A/150V DC	
Leakage current	–	–	–	–	–	–	–	–	–	
Power consumption	4 watts/ 4VA max	4 watts/ 4VA max	4 watts/ 4VA max	4 watts/ 4VA max	4 watts/ 4VA max	4VA max	–	4VA max	4VA max	
Response time	15 ms (3)	15 ms (3)	15 ms (3)	15 ms (3)	15 ms	15 ms	–	23 ms	15 ms	

- (1) Transmitted beam source rated 10...264V AC/DC.
- (2) x = R: On/Off, or T: timer version.
- (3) 18 ms for timer versions.

Table 5 - 70...264V AC/DC Photoelectric Sensors – Solid-state Isolated N.O.

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam		Fiber-optic	
							Source (1)	Receiver	Plastic Visible Red	Glass Infrared
Cat. No. 2 m (9.84 ft) 300V cable	42GxU-9003 (2)	42GxU-9203 (2)	42GxC-9203 (2)	42GxP-9003 (2)	42GRP-9043	–	–	42GRR-9003	42GxF-9103 (2)	42GxF-9003 (2)
Cat. No. 4-pin micro QD	42GxU-9003-QD (2)	42GxU-9203-QD (2)	42GxC-9203-QD (2)	42GxP-9003-QD (2)	42GRP-9043-QD	–	–	42GRR-9003-QD	42GxF-9103-QD (2)	42GxF-9003-QD (2)
Cat. No. 4-pin AC micro QD	42GxU-9003-QD1 (2)	42GxU-9203-QD1 (2)	42GxC-9203-QD1 (2)	42GxP-9003-QD1 (2)	42GRP-9043-QD1	–	42GRL-9043-QD1	42GRR-9003-QD1	42GxF-9103-QD1 (2)	42GxF-9003-QD1 (2)
Supply current	15 mA	15 mA	15 mA	15 mA	15 mA	–	15 mA	15 mA	15 mA	

Table 5 - 70...264V AC/DC Photoelectric Sensors – Solid-state Isolated N.O. (Continued)

Specification	Retroreflective	Polarized Retroreflective	ClearSight	Standard Diffuse	Long Range Diffuse	Extended Range Diffuse	Transmitted Beam		Fiber-optic	
							Source (1)	Receiver	Plastic Visible Red	Glass Infrared
Output energized	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	Light/dark selectable	–	–	Light/dark selectable	Light/dark selectable	Light/dark selectable
Load current	300 mA	300 mA	300 mA	300 mA	300 mA	–	–	300 mA	300 mA	300 mA
Leakage current	1 mA at 264V AC/DC	1 mA at 264V AC/DC	1 mA at 264V AC/DC	1 mA at 264V AC/DC	1 mA at 264V AC/DC	–	–	1 mA at 264V AC/DC	1 mA at 264V AC/DC	1 mA at 264V AC/DC
Power consumption	4 watts/4VA max	4 watts/4VA max	4 watts/4VA max	4 watts/4VA max	4 watts/4VA max	–	–	4VA max	4VA max	4VA max
Response time	2 ms (3)	2 ms (3)	2 ms (3)	2 ms (3)	2 ms	–	–	15 ms	–	2 ms

(1) Transmitted beam source rated 10...264V AC/DC.

(2) x = R: On/Off, or T: timer version.

(3) 5 ms for timer versions.

Conductor Size (AWG)	Max Current/Min Voltage of Overcurrent Protection
20	5 A/300V
22	3 A/300V
24	2 A/300V
26	1 A/300V
28	0.8 A/300V
30	0.5 A/300V

Wiring Diagrams

Shows all models except transmitted beam source.

Figure 1 - Cable Model: 9xx0

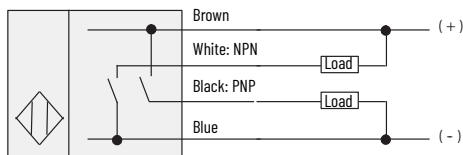


Figure 2 - 4-pin DC Micro QD Model: 9xx0-QD

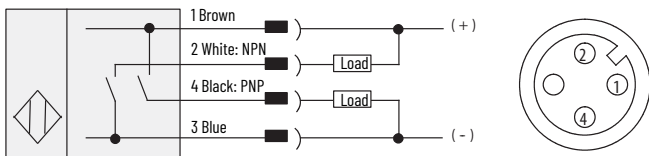


Figure 3 - 4-pin DC Mini QD Model: 9xx0-QD1



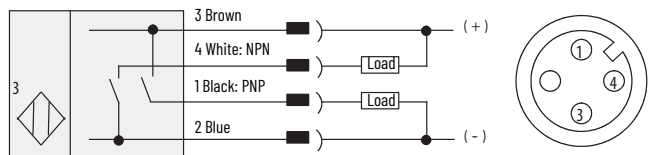


Figure 4 - Cable Model: 9xx3

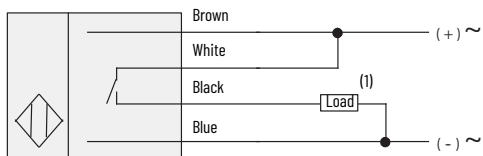

(1) Load can be placed on either black or white wire to create sourcing or sinking respectively.

Figure 5 - AC/DC Mini QD Model: 9xx3-QD

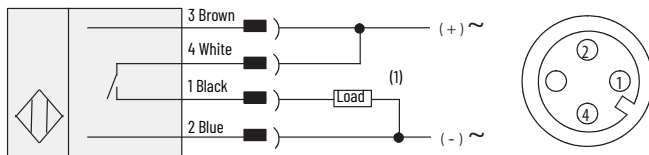

(1) Load can be placed on either black or white wire to create sourcing or sinking respectively.

Figure 6 - AC/DC Micro QD Model: 9xx3-QD11

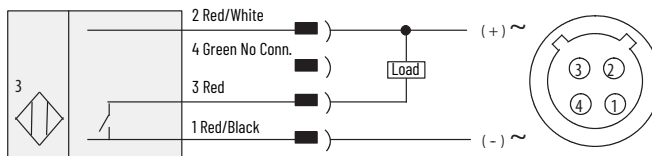


Figure 7 - Cable Model: 9xx1, 9xx2

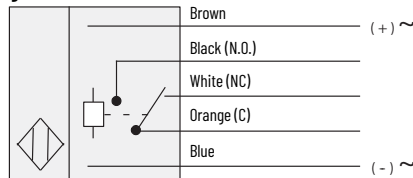


Figure 8 - 5-pin AC/DC Mini QD Model: 9xx1-QD, 9xx2-QD

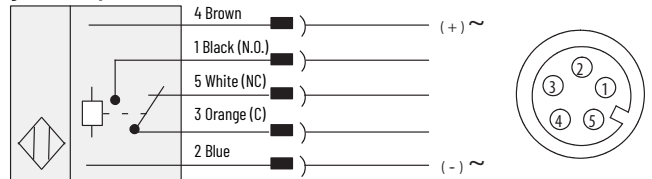


Figure 9 - Transmitted Beam Source Cable Model: 42GRL-90x

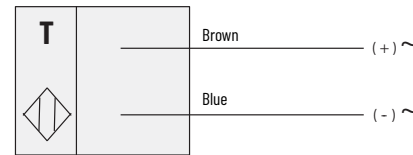


Figure 10 - AC/DC Mini QD Model: 42GRL-90x2-QD

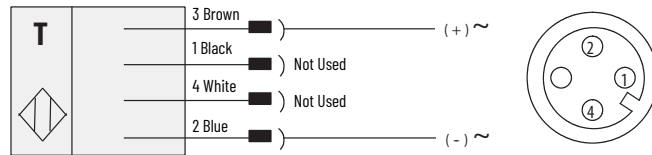


Figure 11 - DC Micro QD Model: 42GRL-90x0-QD


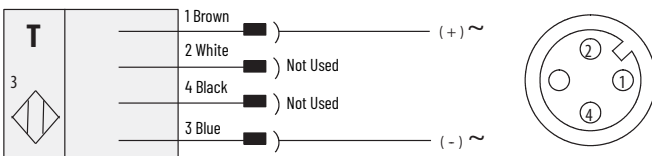


Figure 12 - 4-pin DC Micro QD Model: 42GRL-90x3-QD1

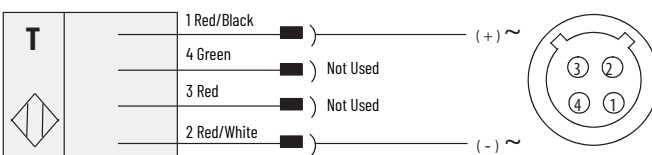

Typical Response Curves

Figure 13 - Retroreflective [mm (in.)]

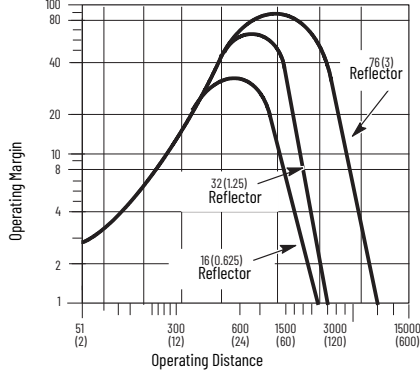


Figure 14 - Polarized Retroreflective [mm (in.)]

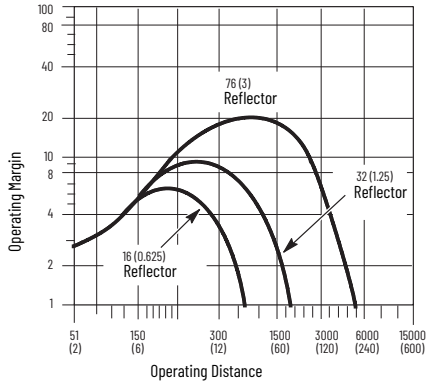


Figure 15 - ClearSight Clear Object Detector [mm (in.)]

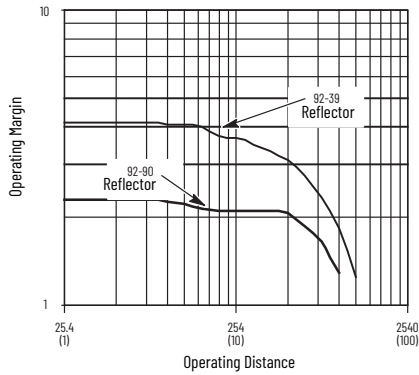


Figure 16 - Standard Diffuse [mm (in.)]

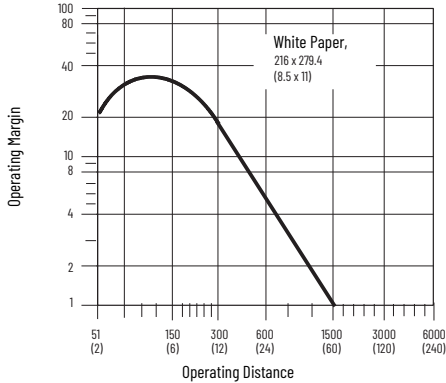


Figure 17 - Long Range Diffuse

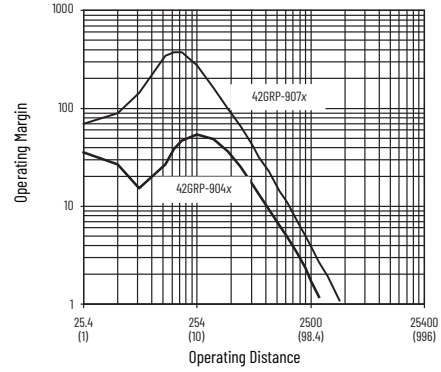


Figure 18 - Transmitted Beam, 61 m (200 ft), 152 m (500 ft) Light Source [mm (in.)]

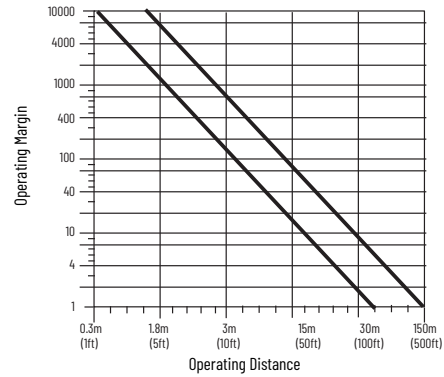


Figure 19 - Visible Red Fiber-optic Standard Diffuse

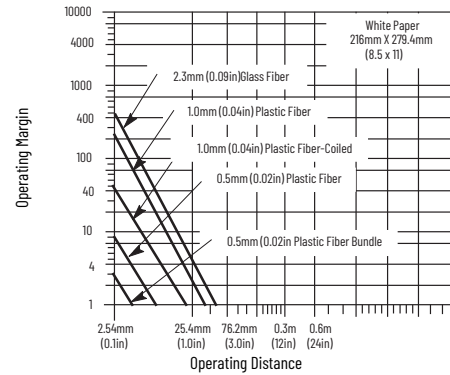


Figure 20 - Visible Red Fiber-optic Transmitted Beam

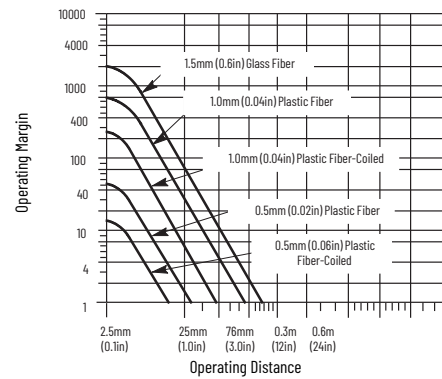


Figure 21 - Visible Red Fiber-optic Retroreflective

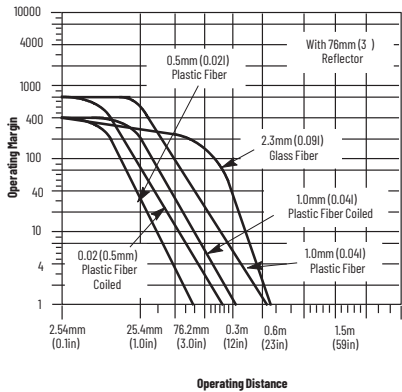


Figure 22 - Infrared Fiber-optic Standard Diffuse

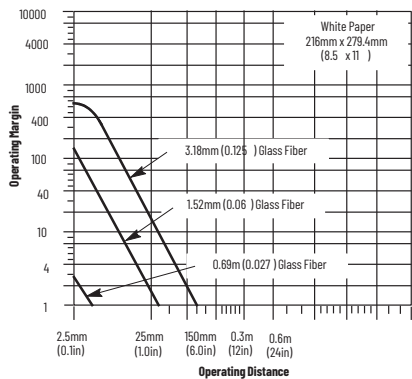


Figure 23 - Infrared Fiber-optic Transmitted Beam


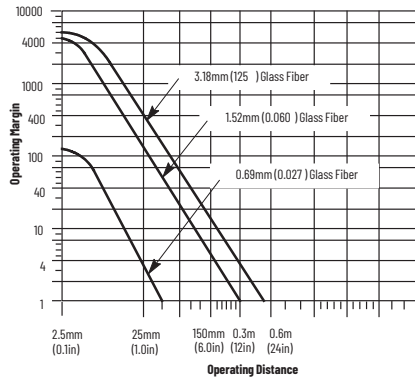


Figure 24 - Infrared Fiber-optic Retroreflective

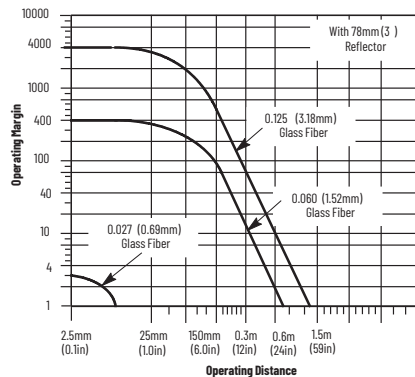

Approximate Dimensions

Figure 25 - All Cable Versions Except Fiber-optic [mm (in.)]

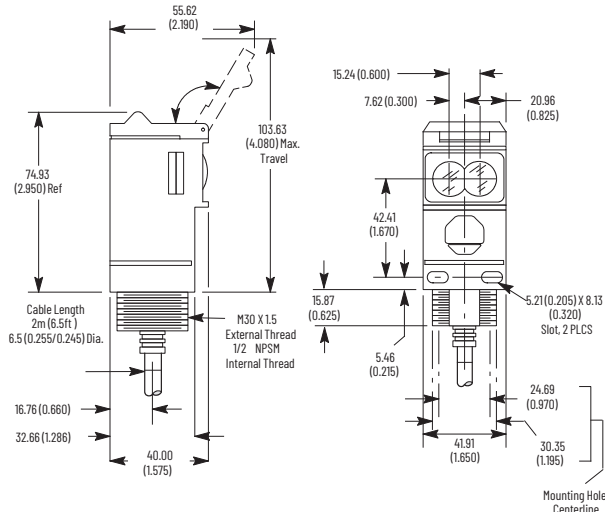


Figure 26 - Fiber-optic [mm (in.)]

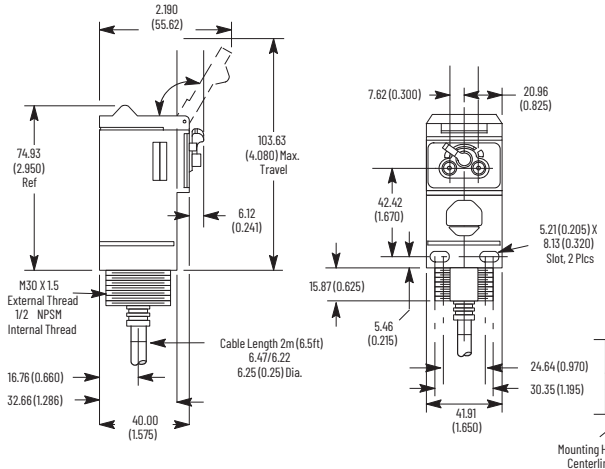


Figure 27 - ClearSight 9000 Versions [mm (in.)]


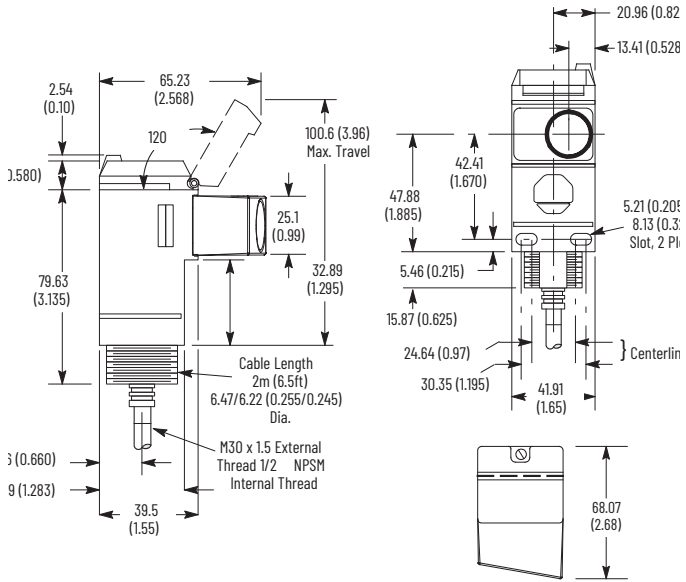


Figure 28 - Connector Version [mm (in.)]

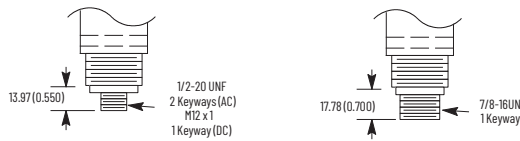

Accessories

Figure 29 - Swivel/tilt Mounting Assembly #60-2439 [mm (in.)]

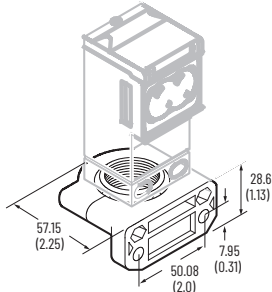


Figure 30 - Swivel/tilt Mounting Assembly #60-2681 for ClearSight 9000 [mm (in.)]


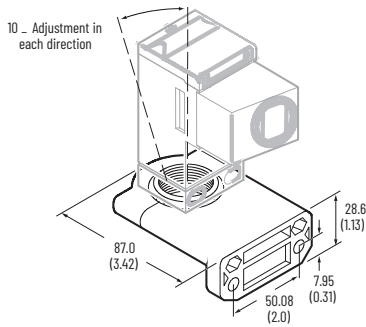



Figure 31 - Vertical Height Adjustment Brackets [mm (in.)]

- #60-2721 = height 4 inches
- #60-2722 = height 6 inches
- #60-2723 = height 8 inches
- #60-2724 = height 10 inches

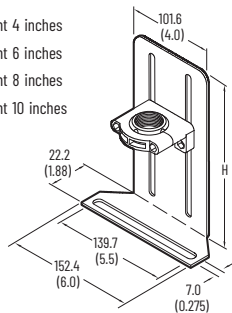

Operational Notes

Figure 32 - Ambient Temperature Ratings

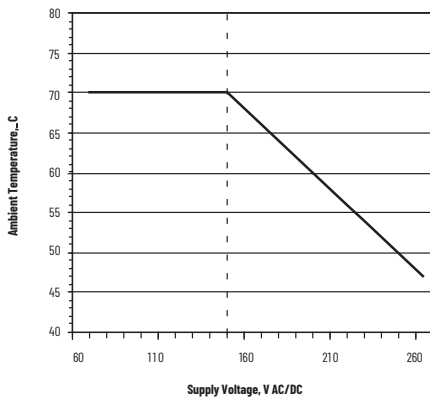


All models of the Series 9000 photoelectric sensor, except for models with the solid-state output (catalog number 42Gxx-9xx3) and the EM-relay output (catalog number 42Gxx-9xx2), have a maximum operating temperature of 70 °C (158 °F). The maximum operating temperature of models 42Gxx-9xx3 and 42Gxx-9xx2 can be

determined from Figure 32. The temperature is based on the supply voltage that is fed to the photoelectric sensor. For example, if the operating voltage is 120V AC, the maximum operating temperature would be 70 °C (158 °F). An operating voltage of 220V AC would limit the ambient operating temperature to 55 °C (131 °F). Operation of the photoelectric sensor at ambient temperatures that exceed these limits could result in sensor failure.


Mounting and Wiring

Securely mount the photoelectric sensor on a firm, stable surface or support. A mount that is subject to excessive vibration or shifts can cause intermittent operation. Rockwell Automation offers a wide variety of fixed and adjustable mounting brackets and reflectors and quick disconnect cables. The photoelectric sensor is supplied with the hardware kit #129-130, which contains a plastic mounting nut, lock washer, and two M5 x 0.8 x 53 screws and nuts. Once securely mounted, the photoelectric sensor can be wired as indicated in the wiring diagrams.

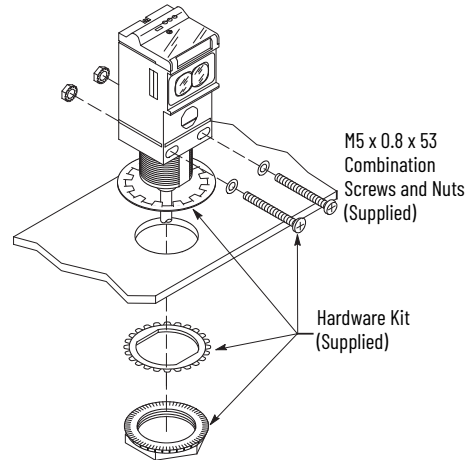


Install Fiber-Optic Cables (42GxF-9xxx models only)

1. Confirm that the fiber-optic cable locking lever on the photoelectric sensor is in the unlocked position.
2. Insert the fiber-optic cable until the internal clip mechanism is engaged.

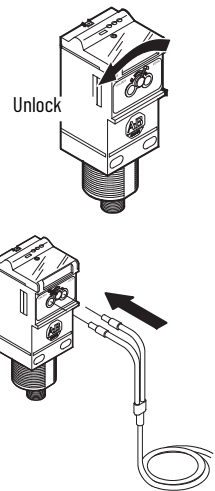

3. Rotate the locking lever to the lock position.
4. Mount the fiber-optic cable sensing tip end as appropriate.



Wiring the Photoelectric Sensor

The Series 9000 photoelectric sensor is available in one of three different connection types as identified in Specifications on page 1. We recommend the use of the 889 Series of cordsets and patchcords on the quick disconnect models. All

external wiring must conform to the National Electrical Code and all applicable local codes.

Align and Configure the Photoelectric Sensor


All Models Except 42GSP-9000

User Interface

To gain access to the user interface panel, use a screwdriver to open the top cover of the photoelectric sensor. This panel contains a single-turn sensitivity adjustment knob, a two-position mode selector switch, and three status indicators. Use the screwdriver to increase (clockwise) or decrease (counterclockwise) the sensitivity to meet the application requirements. The factory default setting for all versions is maximum sensitivity.

IMPORTANT Damage to the single-turn sensitivity adjustment knob occurs if it is turned beyond the in/max steps. After initial photoelectric sensor configuration, confirm that the user interface cover is closed tightly to maintain specified environmental ratings.

Figure 33 - 42GRx Top View Detail

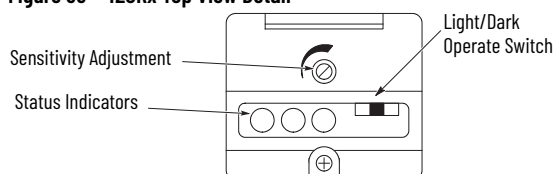

The Series 9000 photoelectric sensor also contains a two-position selector switch. This switch is used to select either Light- or Dark-operate mode of the photoelectric sensor. In Light-operate mode, the photoelectric sensor output turns on when light is being reflected back to it (reflector for retroreflective, source for transmitted beam, or target for diffuse). In Dark-operate mode, the photoelectric sensor output turns off when no light is being reflected back to it. See [Table 6](#).

Photoelectric Sensor Alignment

The red status indicator is an alignment aid, which indicates that a margin of 2.5X is reached. At this margin, the photoelectric sensor is receiving at least 2.5 times the signal strength back from the target that triggers an output signal. A higher margin is recommended to help overcome any deteriorating environmental conditions, such as dust buildup on the lens of the photoelectric sensor. When aligning the photoelectric sensor, the best performance is obtained if the margin indicator illuminates with the target in place. We recommend leaving the sensitivity at the default maximum setting and change the setting only when necessary.

Table 6 - Status Indicators

Label	Color	State	Status
Output	Green	OFF	Output de-energized, SCP active
		ON	Output energized
Margin	Red	OFF	Margin <2.5
		ON	Margin >2.5
		Flashing	Output SCP active
Power	Yellow	OFF	Sensor not powered
		ON	Sensor powered

Transmitted Beam Versions

1. Visually align the emitter and receiver units (fibers) until the green output status indicator turns on (with Light-operate mode) or turns off (with Dark-operate mode).
2. To be certain that the beam is centered, sweep the emitter or receiver in the horizontal and vertical plane and determine at what position the output indicator turns on and then turns off. Set the sensor (or fiber-optics) midway between both positions. The red margin status indicator is on when the beam is unbroken.

Retroreflective and Polarized Retroreflective Versions

1. Visually align the sensor (or fiber-optic cable) on the reflector until the green output status indicator turns on (with Light-operate mode) or turns off (with Dark-operate mode). Also verify that the red margin status indicator is on.

2. To be certain that the beam is centered, sweep the sensor in the horizontal and vertical plane and determine at what position the output indicator goes turns and then turns off. Set the sensor (or fiber-optics) midway between both positions.
3. Break the beam with the object to be detected and check if the output status indicator turns on (Dark-operate mode). If necessary, turn down the sensitivity adjustment until the output status indicator turns on. Remove the object to restore the light beam and check if the output status indicator turns off again and that the red margin status indicator turns on. If the status indicates do not change, increase the size of the reflector or decrease the distance between the reflector and the photoelectric sensor.

Diffuse Mode

1. Visually align the sensor (or fiber-optic cable) on the object until the green output status indicator turns on (with Light-operate mode) or turns off (Dark-operate mode).
2. To be certain that the beam is centered, sweep the sensor in the horizontal and vertical plane and determine at what position the output indicator goes on and then goes off. Set the sensor (or fiber-optics) midway between both positions.
3. Remove the object in front of the sensor and eliminate any existing background signals by turning down the sensitivity adjustment. Replace the object and verify that the output status indicator turns on and that the margin status indicator is on. If the sensor continues to pick up background reflections, you must either eliminate those reflections (paint with a nonreflective color), or replace the photoelectric sensor with a background suppression, a sharp cutoff diffuse, or a Retroreflective Sensing mode version.

42GSP- 9000 Models

User Interface

Use a screwdriver to open the top cover of the photoelectric sensor to gain access to the user interface panel. This panel contains two push buttons and three status indicators. The left push button puts the photoelectric sensor into Teach mode while the right-hand button is for light/dark operate selection.

Teach Mode

The Teach mode of the 42GSP-9000 photoelectric sensor enables the it to learn both the light and dark conditions that are presented to it and to automatically adjust sensitivity to the optimal level for the application. This mode replaces the sensitivity adjustment knob of a conventional photoelectric sensor.

With the photoelectric sensor pointed at the light condition (target), momentarily press the Teach button until the red status indicator turns on. After 3 seconds, this status indicator flashes, which indicates that it is ready to receive the dark condition (background). The red status indicator momentarily remains steady, then turns off, which indicates that the teach operation was successful.


The 42GSP-9000 photoelectric sensor also contains a two-position push button. This button selects either Light- or Dark-operate mode of the photoelectric sensor. In Light-operate mode, the photoelectric sensor output turns on when light is reflected back to it (indicated by the output status indicator being on). In Dark-operate mode, the photoelectric sensor output turns on when no light is reflected back to it.

[Table 34](#) describes the function of the three status indicators.

Figure 34 - Status Indicators

Label	Color	State	Status
OUT	Yellow	OFF	Output de-energized
		ON	Output energized
SET/SCP	Red	OFF	Normal operation
		ON	Teach mode active present dark condition
		Flashing	Teach mode active present light condition, output SCP active
PWR/STAB	Green	OFF	Sensor not powered
		ON	Sensor powered
		Flashing	Unstable margin condition


Figure 35 - 42GSP Top View Detail

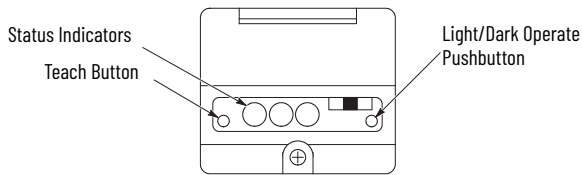

42GTx Models

Some versions of the Series 9000 photoelectric sensor also contain a four-bank DIP switch (S1...S4) and two rotary knobs (R2 and R3). These devices are used to configure internal on, off, and one-shot time delays making it possible to provide some degree of local control in an application.

Figure 36 - Timing Photoelectric Sensors Top View Detail

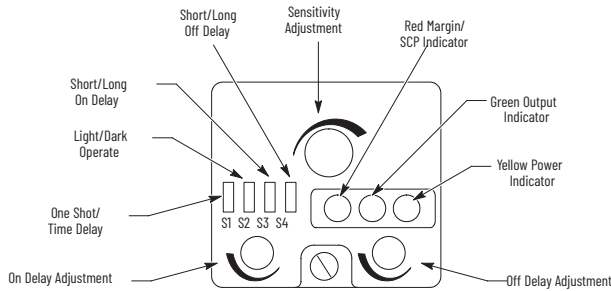

The timers are nonretriggerable. The timing can be set for short (0...1.5 s) or long (0...15 s) duration using the DIP switches and adjusted via the two 15-turn rotary knobs. See [Figure 37](#) and [Figure 38](#) to configure these timers.

IMPORTANT After initial photoelectric sensor configuration, confirm that the user interface cover is closed tightly to maintain specified environmental ratings.

42GRL Models

For the 9003 model photoelectric sensors, the switch must be pushed to the left, towards 9003. For all other models, the switch must be pushed to the right, towards default.



Figure 37 - Typical ON/OFF Timing Diffuse (Light-operate) Nonretriggerable


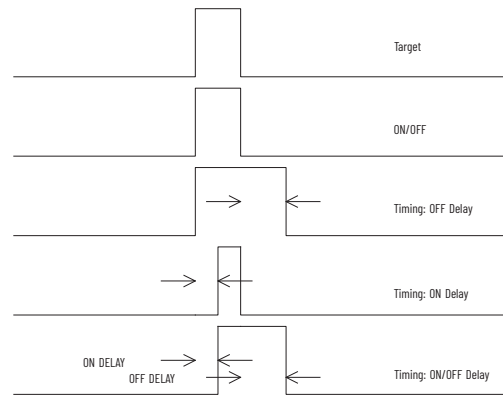


Figure 38 - Typical One-Shot Timing Diffuse (Light-operate) Nonretriggerable

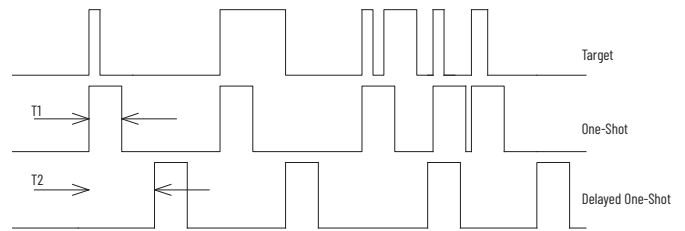

T1 is adjusted via the off delay potentiometer with either a long (0...15 s) or short (0...1.5 s) DIP switch setting. T2 is adjusted via the on delay potentiometer with either a long (0...15 s) or short (0...1.5 s) DIP switch setting.

Application Example

Product travels down a conveyor. If the product is a white box, a kicker located 3 seconds down the conveyor activates to push the box down another conveyor. The kicker must extend and retract for 1 second. The sensor is a 42GTP-9000 photoelectric sensor. In this application, an on and off delay are required. Set the first DIP switch (S1) to TD position. Switch (S2) is set to LT position. Switch (S3) is set to L position for a 3 second delay. Switch (S4) is set to the S position. The delay is adjusted by turning the on delay pot clockwise until the proper delay time is set. The off delay pot is turned clockwise so to set the 1 second off delay.

Waste Electrical and Electronic Equipment (WEEE)



At the end of life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback. For technical support, visit rok.auto/support.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.

rockwellautomation.com expanding human possibility®

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846



PN-158404

Allen-Bradley, expanding human possibility, PHOTOSWITCH, and Rockwell Automation are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

Publication 42G-IN003B-EN-P - October 2021 | Supersedes Publication 42G-IN003A-EN-P - August 2014
Copyright © 2021 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.

PN-158404
DIR 10000321004 Ver 02