

Technical Information

T53, T54 and T55

Explosion proof thermocouple assemblies in thermowells with spring loaded insert and enclosure for process industry



Application

Magnesium Oxide insulated thermocouples, commonly referred to as MgO thermocouples, are used in many process and laboratory applications. They have many desirable characteristics making thermocouples a good choice for general and special purpose applications.

The sensor assemblies can be used in process industries such as:

- Chemicals
- Petrochemical
- Refineries
- Offshore Platforms

Head transmitter

All Endress+Hauser transmitters are available with enhanced accuracy and reliability compared to directly wired sensors. Easy customizing by choosing one of the following outputs and communication protocols:

- Analog output 4 to 20 mA
- HART®
- PROFIBUS® PA
- FOUNDATION Fieldbus™

Field transmitter

Temperature field transmitters with HART® or FOUNDATION Fieldbus™ protocol for highest reliability in harsh industrial environments. Blue backlit display with large measured value, bargraph and fault condition indication for ease of reading.

Your benefits

- FM/CSA XP Class I, Div. 1 approved temperature assemblies for maximum safety.
- One source shopping for temperature measurement solutions. World class transmitter with integrated sensor offering for heavy process industry applications. Remove and install straight out of the box!
- Improved galvanic isolation on most devices (2 kV)
- Simplified model structure: Competitively priced, offers great value. Easy to order and reorder. A single model number includes sensor, thermowell and transmitter assembly for a complete point solution.
- All iTEMP transmitters provide long-term stability $\leq 0.05\%$ per year


Function and system design

Measuring principle

Thermocouples (TC)

Thermocouples are comparatively simple, robust temperature sensors which use the Seebeck effect for temperature measurement: if two electrical conductors made of different materials are connected at a point, a weak electrical voltage can be measured between the two open conductor ends if the conductors are subjected to a thermal gradient. This voltage is called thermoelectric voltage or electromotive force (emf.). Its magnitude depends on the type of conducting materials and the temperature difference between the "measuring point" (the junction of the two conductors) and the "cold junction" (the open conductor ends). Accordingly, thermocouples primarily only measure differences in temperature. The absolute temperature at the measuring point can be determined from these if the associated temperature at the cold junction is known or is measured separately and compensated for. The material combinations and associated thermoelectric voltage/temperature characteristics of the most common types of thermocouple are standardized in the IEC 60584 and ASTM E230/ANSI MC96.1 standards.

Measuring system

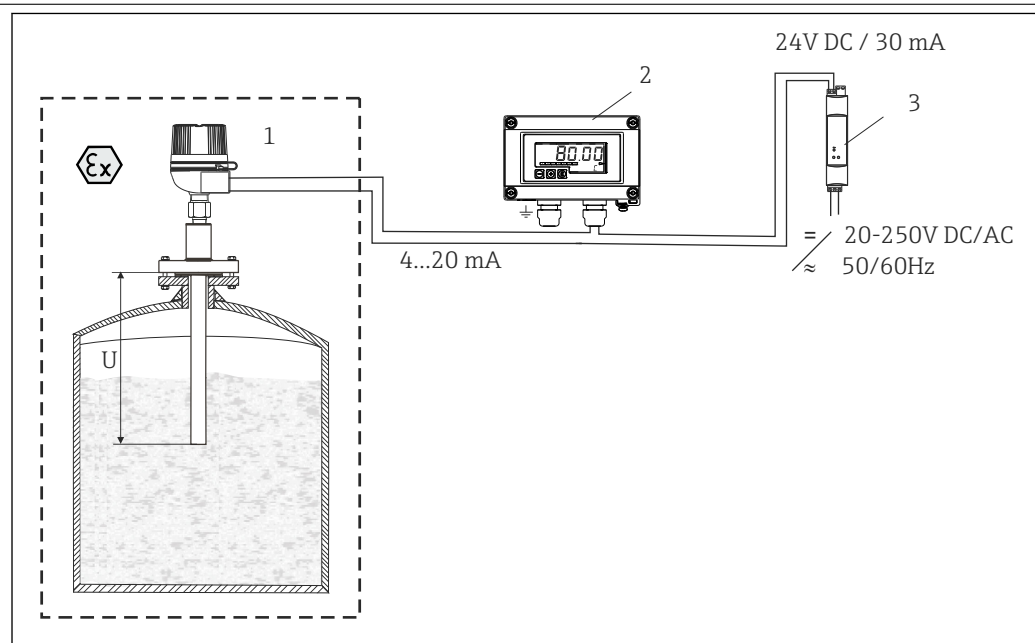

A0024883

1 Application example

- 1 Mounted thermometer with head transmitter installed.
- 2 RIA15 process display - The display unit records the analog measuring signal from the head transmitter and shows this on the display. The LC display shows the current measured value in digital form and as a bar graph indicating a limit value violation. The process display unit is integrated in the 4 to 20 mA or HART® loop and is powered directly from the current loop. Optionally up to four of a sensor's HART® process variables can be displayed. More information on this can be found in the Technical Information, see "Documentation".
- 3 Active barrier RN221N - The RN221N (24 V_{DC}, 30 mA) active barrier has a galvanically isolated output for supplying voltage to loop-powered transmitters. The universal power supply works with an input supply voltage of 20 to 250 V DC/AC, 50/60 Hz, which means that it can be used in all international power grids. More information on this can be found in the Technical Information, see "Documentation".

Input

Measured variable Temperature (temperature-linear transmission behavior)

Measurement range

Upper temperature limits for various sheath diameters °C (°F)					
Sheath O.D.	Type T	Type J	Type E	Type K	Type N
∅ ¼ in	370 °C (700 °F)	370 °C (700 °F)	820 °C (1 510 °F)	1 150 °C (2 100 °F)	
Maximum element temperature range limits	-270 to +400 °C (-454 to +752 °F)	-210 to +1 200 °C (-346 to +2 192 °F)	-270 to +1 000 °C (-454 to +1 832 °F)	-270 to +1 372 °C (-454 to +2 500 °F)	-270 to +1 300 °C (-454 to +2 372 °F)



These values are valid for single and duplex thermocouples. The temperature limits given are intended only as a guide to the user and should not be taken as absolute values or as guarantees of satisfactory life or performance. These types and sizes are sometimes used at temperatures above the given limits, but usually at the expense of stability or life or both. In other instances, it may be necessary to reduce the above limits in order to achieve adequate service.

Thermocouples with 316 SS sheath and assemblies with 316 SS thermowells are rated for a maximum temperature of 927 °C (1 700 °F).

Output

Output signal

Generally, the measured value can be transmitted in one of two ways:

- Directly-wired sensors - sensor measured values forwarded without a transmitter.
- Via all common protocols by selecting an appropriate Endress+Hauser iTEMP temperature transmitter. All the transmitters listed below are mounted directly in the terminal head or as field transmitter and wired with the sensory mechanism.

Family of temperature transmitters

Thermometers fitted with iTEMP transmitters are an installation-ready complete solution to improve temperature measurement by significantly increasing accuracy and reliability, when compared to direct wired sensors, as well as reducing both wiring and maintenance costs.

PC programmable head transmitters

They offer a high degree of flexibility, thereby supporting universal application with low inventory storage. The iTEMP transmitters can be configured quickly and easily at a PC. Endress+Hauser offers free configuration software which can be downloaded from the Endress+Hauser Website. More information can be found in the Technical Information.

HART® programmable head transmitters

The transmitter is a 2-wire device with one or two measuring inputs and one analog output. The device not only transfers converted signals from resistance thermometers and thermocouples, it also transfers resistance and voltage signals using HART® communication. It can be installed as an intrinsically safe apparatus in Zone 1 hazardous areas and is used for instrumentation in the terminal head (flat face) as per DIN EN 50446. Swift and easy operation, visualization and maintenance by PC using operating software, Simatic PDM or AMS. For more information, see the Technical Information.

PROFIBUS® PA head transmitters

Universally programmable head transmitter with PROFIBUS® PA communication. Conversion of various input signals into digital output signals. High accuracy over the complete ambient temperature range. Swift and easy operation, visualization and maintenance using a PC directly from the control panel, e. g. using operating software, Simatic PDM or AMS. For more information, see the Technical Information.

FOUNDATION Fieldbus™ head transmitters

Universally programmable head transmitter with FOUNDATION Fieldbus™ communication. Conversion of various input signals into digital output signals. High accuracy over the complete

ambient temperature range. Swift and easy operation, visualization and maintenance using a PC directly from the control panel, e.g. using operating software such as ControlCare from Endress+Hauser or NI Configurator from National Instruments. For more information, see the Technical Information.

Advantages of the iTEMP transmitters:

- Dual or single sensor input (optionally for certain transmitters)
- Pluggable display (optionally for certain transmitters)
- Unsurpassed reliability, accuracy and long-term stability in critical processes
- Mathematical functions
- Monitoring of the thermometer drift, sensor backup functionality, sensor diagnostic functions
- Sensor-transmitter matching for dual sensor input transmitters, based on Callendar/Van Dusen coefficients

HART® Field transmitter

Field transmitter with HART® communication and blue backlit display. Can be read easily from a distance, in sunlight and at night. Large measurement value, bargraph and fault indication displayed. Benefits are: dual sensor input, highest reliability in harsh industrial environments, mathematic functions, thermometer drift monitoring and sensor back-up functionality, corrosion detection.


Galvanic isolation




Galvanic isolation of Endress+Hauser iTEMP transmitters


Transmitter type	Sensor
TMT181 PCP	$\hat{U} = 3.75 \text{ kV AC}$
TMT182 HART®	$U = 2 \text{ kV AC}$
TMT162 HART® Field transmitter	$U = 2 \text{ kV AC}$
TMT82 HART®	$U = 2 \text{ kV AC}$
TMT84 PA	
TMT85 FF	

Wiring

Wiring diagrams

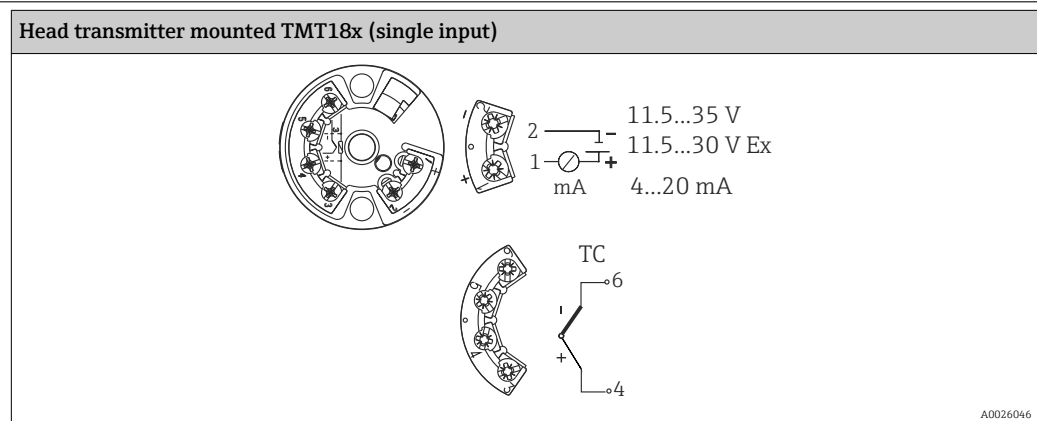

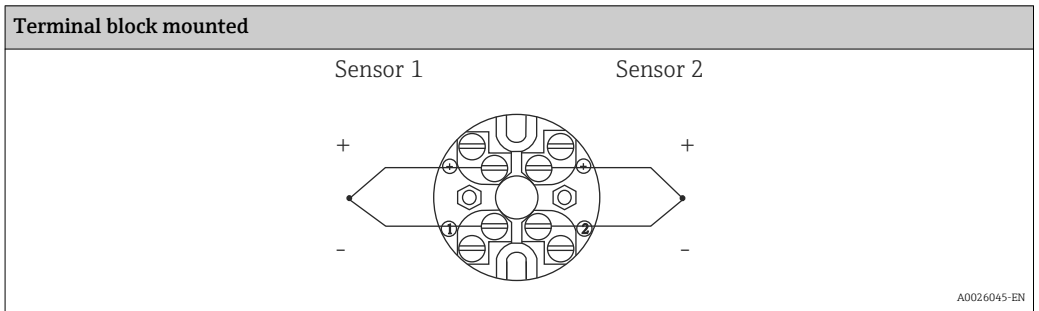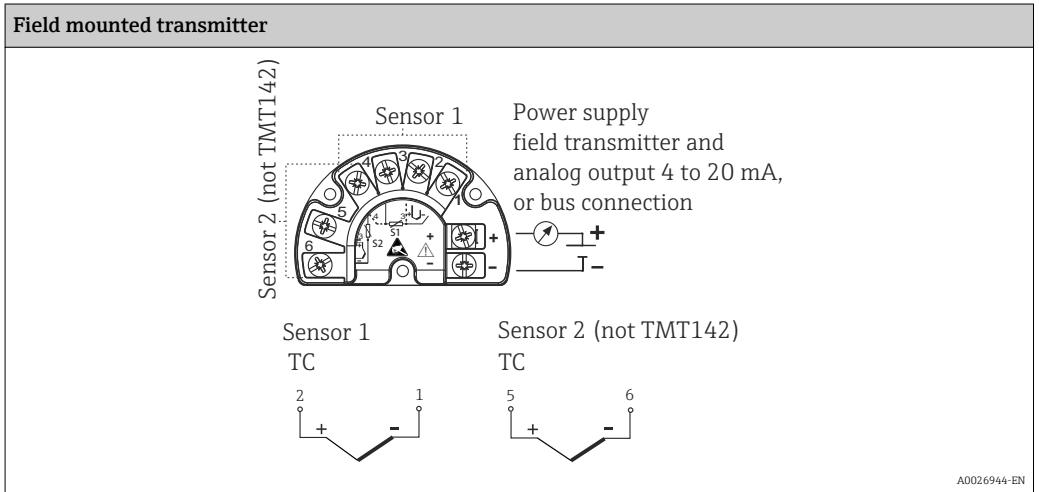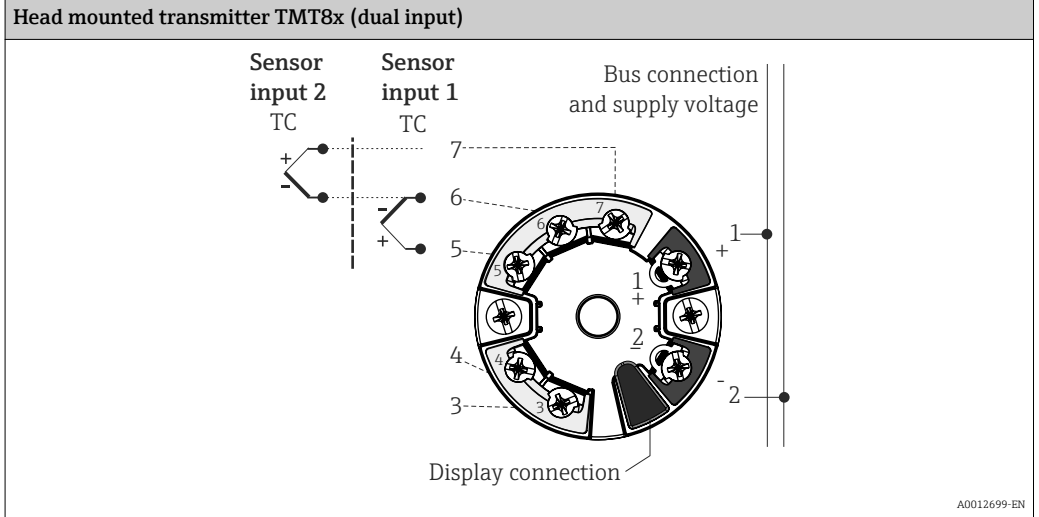


 The blocks and transmitters are shown as they sit inside the heads in reference to the conduit opening.

Wire specifications

Thermocouple grade, TFE insulated 20AWG, 7 strands with stripped ends

Electrical connection

Flying leads, standard 139.7 mm (5.5 in) for wiring in connection head, head mounted transmitter or terminal block mounted, and for wiring with TMT162 or TMT142 assemblies

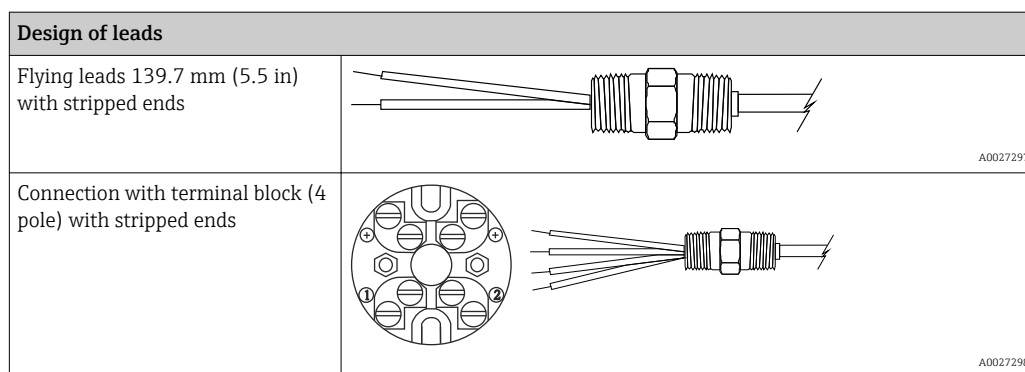

Thermocouple color codes according to ASTM E-230

T.C. Type	POS NEG	Material	MAGNETIC		Insulation	
			YES	NO	Single conductor	Overall T.C. wire
E	EP (+)	Nickel - 10% chromium		X	Purple	Brown
	EN (-)	Copper - 45% nickel (constantan)		X	Red	
J	JP (+)	Iron	X		White	Brown
	JN (-)	Copper - 45% nickel (constantan)		X	Red	
K	KP (+)	Nickel - 10% chromium		X	Yellow	Brown
	KN (-)	Nickel - 5% (aluminum, silicon) ¹⁾	X		Red	
T	TP (+)	Copper		X	Blue	Brown
	TN (-)	Copper - 45% nickel (constantan)		X	Red	
N	NP (+)	Nickel - 14% chromium - 1.5% silicon		X	Orange	Brown
	NN (-)	Nickel - 4.5% silicon - 0.1% magnesium		X	Red	

1) Silicon, or aluminum and silicon may be present in combination with other elements.

Performance characteristics

Reference conditions

These data are relevant for determining the accuracy of the temperature transmitters used. More information on this can be found in the Technical Information of the iTEMP temperature transmitters.

Response time

63% response time per ASTM E839

Thermocouple assembly T55 without thermowell

Junction style	Thermocouple insert $\varnothing\frac{1}{4}$ "
Ungrounded	2.9 s

 Response time for the sensor assembly without transmitter.

Response time examples for thermocouples assemblies with thermowell T53 and T54

Construction	Stepped thermowell	Tapered thermowell	$\frac{3}{4}$ " straight thermowell
Time	15 s	20 s	25 s


 Response times for thermocouple assemblies with thermowell are provided for general design guidance without transmitter.

When the temperature of a process media changes, the output signal of a Thermocouple assembly follows this change after a certain time delay. The physical cause is the time related to heat transfer from the process media through the thermowell and the insert to the sensor element (thermocouple). The manner in which the reading follows the change in temperature of the assembly over time is referred to as the response time. Variables that influence or impact the response time are:

- Wall thickness of thermowell
- Spacing between thermocouple insert and thermowell
- Sensor packing
- Process parameters such as media, flow velocity, etc.

Maximum measured error Thermocouples corresponding to ASTM E839

Type	Temperature range	Standard tolerance (IEC class 2)	Special tolerance (IEC class 1)
		[°C] whichever is greater	[°C] whichever is greater
E	0 to 870 °C (32 to 1 600 °F)	±1.7 or ±0.5%	±1 or ±0.4%
J	0 to 760 °C (32 to 1 400 °F)	±2.2 or ±0.75%	±1.1 or ±0.4%
K	0 to 1 260 °C (32 to 2 300 °F)	±2.2 or ±0.75%	±1.1 or ±0.4%
T	0 to 370 °C (32 to 700 °F)	±1 or 0.75%	±0.5 or ±0.4%
N	0 to 1 260 °C (32 to 2 300 °F)	±2.2 or ±0.75%	±1.1 or ±0.4%

 For measurement errors in °F, calculate using equation above in °C, then multiply the outcome by 1.8.


Transmitter long-term stability ≤ 0.1 °C (0.18 °F) / year or ≤ 0.05 % / year
Data under reference conditions; % relates to the set span. The larger value applies.

Insulation resistance Insulation resistance for MgO insulated thermocouples with ungrounded hot junction between terminals and probe sheath, test voltage 500 V_{DC}.
1000 MΩ at 25 °C (77 °F)
These values for insulation resistance also apply between each thermocouple wire at single and duplex constructions with ungrounded hot junction.

Installation conditions

Orientation No restrictions.

Installation instructions

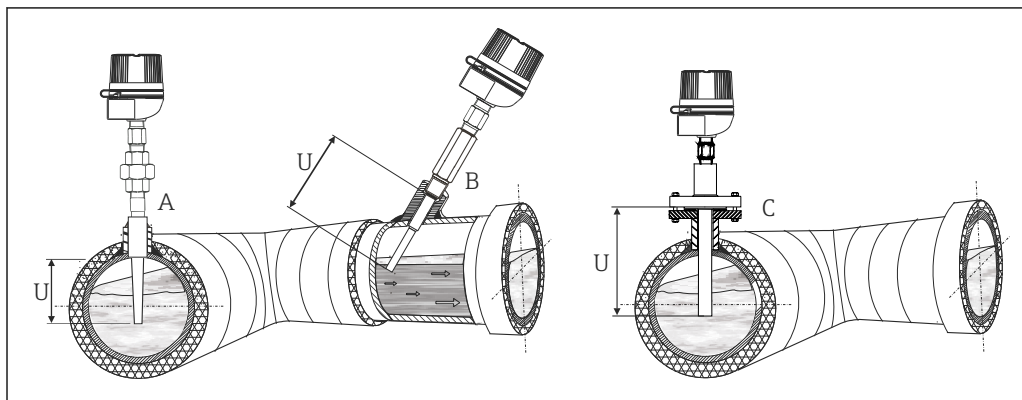

A0025312

2 Installation examples

- A-C In pipes with a small cross section the thermowell tip should reach or extend slightly past the center line of the pipe (= U)
 B Threaded, angled installation of T53 assembly
 C Flange installation of T54 assembly

The immersion length of the thermometer influences the accuracy. If the immersion length is too small then errors in the measurement are caused by heat conduction via the process connection and the container wall. If installing into a pipe then the immersion length should be at least half of the pipe diameter. A further solution could be an angled (tilted) installation (see B). When determining the immersion length all thermometer parameters and the process to be measured must be taken into account (e.g. flow velocity, process pressure).

- Installation possibilities: Pipes, tanks or other plant components
- Minimum immersion length per ASTM E644, $\Delta T \leq 0.05 \text{ }^\circ\text{C}$ (0.09 $^\circ\text{F}$):

For temperature assemblies with thermowell (T53 and T54) the minimum immersion is the depth to which the thermowell is immersed in the medium, measured from the tip. To minimize errors from ambient temperature the following minimum immersion lengths are recommended:

Construction	Minimum immersion
Stepped thermowell	63.5 mm (2.5 in)
Tapered thermowell	114.3 mm (4.5 in)
¾" straight thermowell	101.6 mm (4 in)
Weld-in thermowell	114.3 mm (4.5 in)

i T55 assemblies can only be used in existing thermowells.

Environment

Ambient temperature

Terminal head	Temperature in $^\circ\text{C}$ ($^\circ\text{F}$)
Without mounted head transmitter	Depends on the terminal head used and the cable gland or fieldbus connector, see 'Terminal heads' section
With mounted head transmitter	-40 to 85 $^\circ\text{C}$ (-40 to 185 $^\circ\text{F}$)
With mounted head transmitter and display	-20 to 70 $^\circ\text{C}$ (-4 to 158 $^\circ\text{F}$)


Shock and vibration resistance

4 g/2 to 150 Hz as per IEC 60068-2-6

Mechanical construction

Design, dimensions

All dimensions in inch. For values related to the graphics please refer to the tables and equations below.

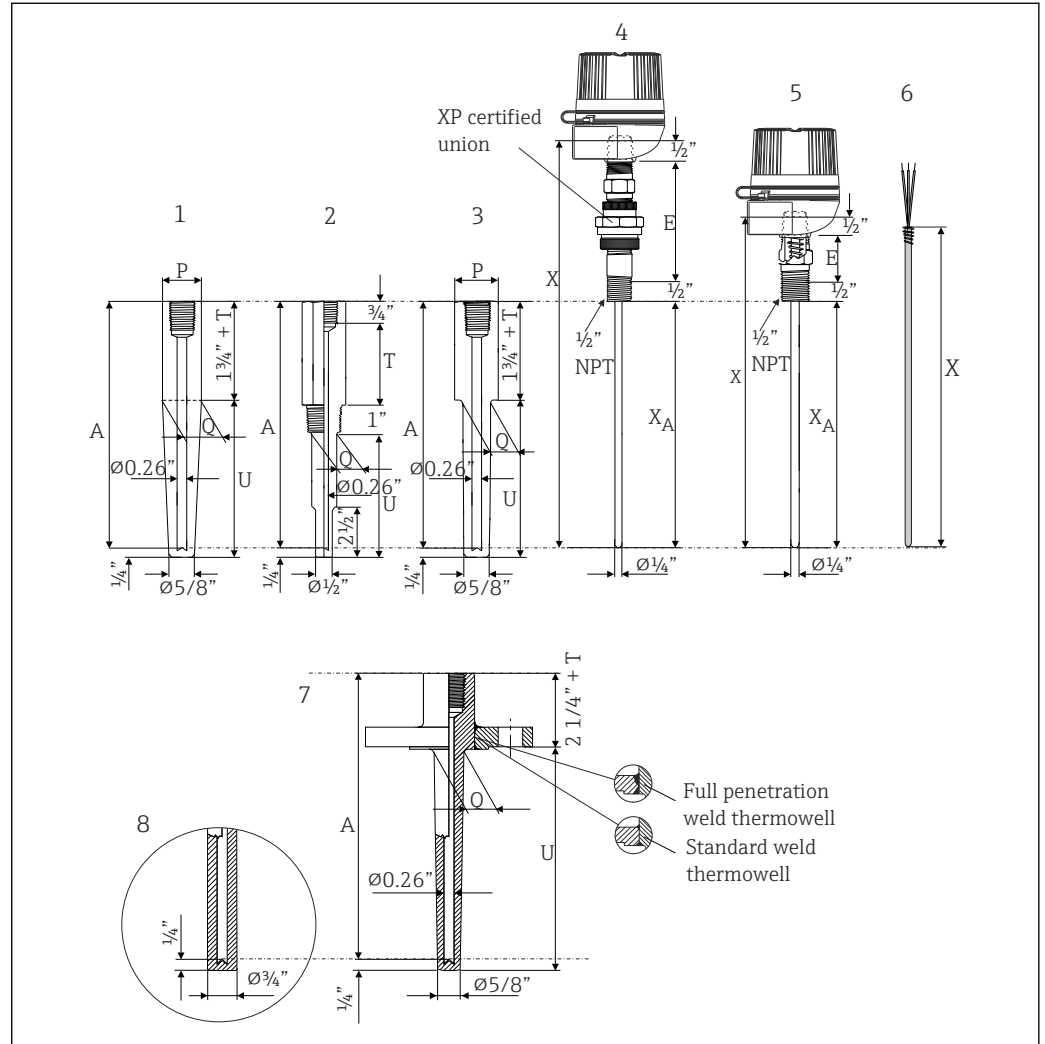

A0025328-EN

3 Dimensions of the sensor assemblies

- 1 T53 weld-in thermowell (tapered)
- 2 T53 threaded thermowell (stepped)
- 3 T53 socket weld thermowell (tapered)
- 4 T53/T54 extension, nipple-XP-union-nipple (NUN), without thermowell
- 5 T53/T54 extension hex nipple without thermowell
- 6 TU121 spring loaded insert
- 7 T54 flange thermowell (tapered)
- 8 Straight thermowell tip
- E Extension length
- P Pipe size
- Q Thermowell root diameter
- T Lag dimension
- U Thermowell immersion length
- XA Immersion length thermocouple sensor
- A Drill depth of thermowell
- X Overall insert length

i For T53 thermowells with 1/2" NPT and 1" process thread length and 3/4" hex length dimensions, spring loaded sensor assemblies must be used with the thermowells.

All thermowells are marked with a material ID, CRN (Canadian Registration Number) and heat number.


Dimensions of T53

U	E (nominal dimension)	T	Process connection	Shape of thermowell	ØQ	
63.5 mm (2.5 in)	Material: Steel or 316SS Hex nipple = 25.4 mm (1 in) Nipple Union Nipple (NUN) = 101.6 mm (4 in) 177.8 mm (7 in)	76.2 mm (3 in) or specified length 25.4 to 152.4 mm (1 to 6 in) in ½" increments	½" NPT	Stepped (standard duty)	16 mm (⅝ in)	
114.3 mm (4.5 in)				Tapered (heavy duty)	16 mm (⅝ in)	
			190.5 mm (7.5 in)	¾" NPT	Stepped (standard duty)	19.05 mm (¾ in)
Tapered (heavy duty)					22.3 mm (⅞ in)	
266.7 mm (10.5 in)			1" NPT	Stepped (standard duty)	22.3 mm (⅞ in)	
				Tapered (heavy duty)	26.9 mm (1 ⅛ in)	
342.9 mm (13.5 in)			¾" socket weld	Stepped (standard duty)	19.05 mm (¾ in)	
				Tapered (heavy duty)	22.3 mm (⅞ in)	
419.1 mm (16.5 in)			1" socket weld	Stepped (standard duty)	22.3 mm (⅞ in)	
				Tapered (heavy duty)	25.4 mm (1 in)	
571.5 mm (22.5 in)			¾" weld in	Tapered (heavy duty)	26.6 mm (1.050 in)	
specified length			1" weld in	Tapered (heavy duty)	33.4 mm (1.315 in)	
50.8 to 571.5 mm (2 to 22.5 in) in ½" increments						
Immersion length thermocouple sensor = thermowell drilled length			$X_A = A = U + 38.1 \text{ mm (1.5 in) + T}$			
Overall insert length			$X = A + E$			
P = Pipe size						
<ul style="list-style-type: none"> ■ ¾" Nominal utilizes 1.050" ■ 1" Nominal utilizes 1.315" 						

Dimensions of T54

U	E (nominal dimension)	T	Flange size	ØQ, tapered version
50.8 mm (2 in)	Hex nipple = 25.4 mm (1 in) or	specified length 25.4 to 254 mm (1 to 10 in) in ½" increments	25.4 mm (1 in)	22.3 mm (⅞ in)
101.6 mm (4 in)	Nipple Union Nipple (NUN) = 101.6 mm (4 in) 177.8 mm (7 in)		38.1 mm (1 ½ in)	26.9 mm (1 ⅛ in)
177.8 mm (7 in)			50.8 mm (2 in)	26.9 mm (1 ⅛ in)
254 mm (10 in)				
330.2 mm (13 in)				
406.4 mm (16 in)				
558.8 mm (22 in)				

U	E (nominal dimension)	T	Flange size	ØQ, tapered version
specified length 50.8 to 571.5 mm (2 to 22.5 in) in ½" increments				
Immersion length thermocouple sensor = thermowell drilled length $X = A = U + 50.8 \text{ mm (2 in) } + T$				
Overall insert length		$X = A + E$		

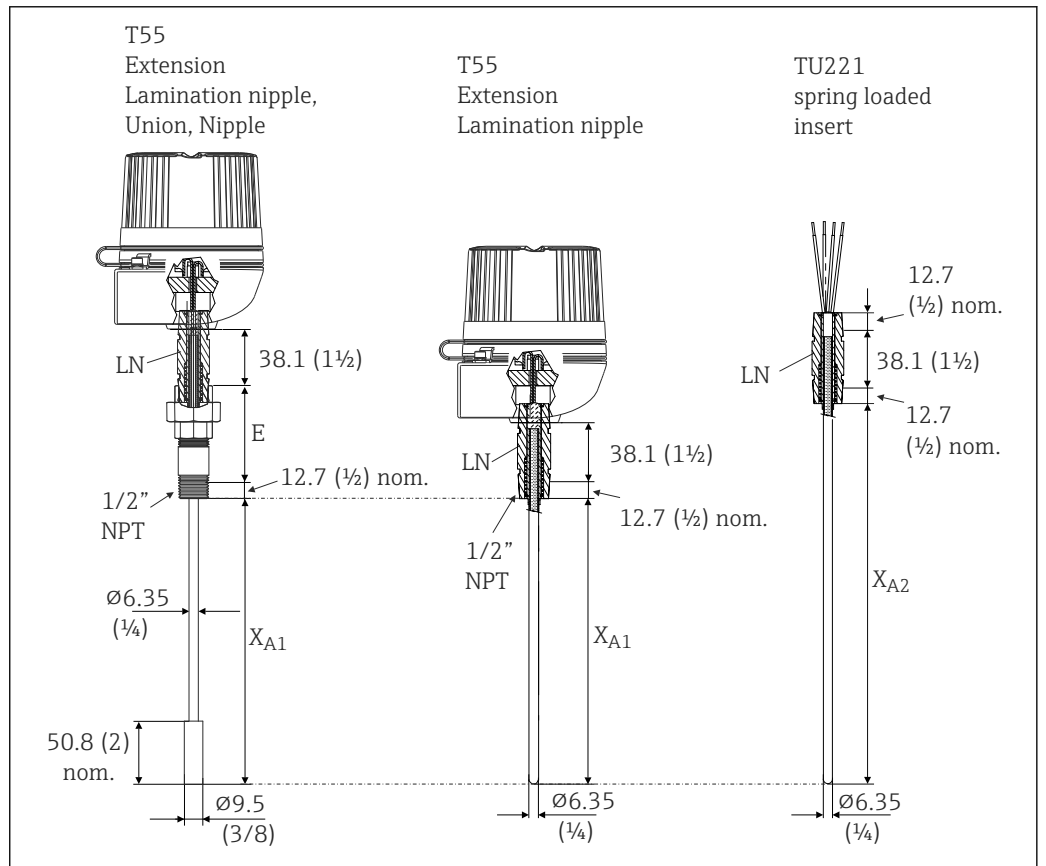

4 Design and dimensions of T55 (without thermowell), all dimensions in mm (in)

E Extension length (nominal dimension)

LN Lamination nipple (flamepath nipple)


X_{A1} Insert immersion length

X_{A2} Insert immersion length TU221

i When ordering a sensor with a 3/8" diameter, only the bottom 2" will have an outer diameter of 3/8".

Dimensions of T55 (without thermowell)		Extension E
Immersion length	Thermocouple sensor X _{A1}	Lamination Nipple Union Nipple (LUN) = 76.2 mm (3 in) or 152.4 mm (6 in)
	specified length 101.6 to 2 540 mm (4 to 100 in) in ½" increments	
	Thermocouple sensor X _{A2} for spring loaded insert TU221 as spare part insert for Lamination Nipple Union Nipple (LUN) version ¹⁾	
	Calculate X _{A2} as follows: X _{A1} +E	

1) Order code for spring loaded insert TU221 (TU221-__5__)

Hot or measuring junction**Ungrounded junction**

 5 *Ungrounded junction*

The welded thermocouple junction is fully isolated from the welded closed end sheath. This junction provides electrical isolation to reduce problems associated with electrical interference. Ungrounded junctions are also recommended for use in extreme positive or negative temperatures, rapid thermal cycling and for ultimate corrosion resistance of the sheath alloy. iTEMP transmitters have an excellent noise immunity (EMC) meeting all requirements listed under IEC 61326 for use in noisy environments.

 Dual ungrounded elements supplied with individually isolated junctions.

Weight

1 to 30 lbs

Material

Process connection and thermowell

The temperatures for continuous operation specified in the following table are only intended as reference values for use of the various materials in air and without any significant compressive load. The maximum operation temperatures are reduced considerably in some cases where abnormal conditions such as high mechanical load occur or in aggressive media.




Material name	Short form	Recommended max. temperature for continuous use in air	Properties
AISI 316/1.4401	X5CrNiMo17-12-2	650 °C (1202 °F) ¹⁾	<ul style="list-style-type: none"> ▪ Austenitic, stainless steel ▪ High corrosion resistance in general ▪ Particularly high corrosion resistance in chlorine-based and acidic, non-oxidizing atmospheres through the addition of molybdenum (e.g. phosphoric and sulfuric acids, acetic and tartaric acids with a low concentration)
AISI 316L/1.4404/1.4435	X2CrNiMo17-12-2 X2CrNiMo18-14-3	650 °C (1202 °F)	<ul style="list-style-type: none"> ▪ Austenitic, stainless steel ▪ High corrosion resistance in general ▪ Particularly high corrosion resistance in chlorine-based and acidic, non-oxidizing atmospheres through the addition of molybdenum (e.g. phosphoric and sulfuric acids, acetic and tartaric acids with a low concentration) ▪ Increased resistance to intergranular corrosion and pitting ▪ Compared to 1.4404, 1.4435 has even higher corrosion resistance and a lower delta ferrite content
Alloy600	NiCr15Fe	1100 °C (2012 °F)	<ul style="list-style-type: none"> ▪ A nickel/chromium alloy with very good resistance to aggressive, oxidizing and reducing atmospheres, even at high temperatures ▪ Resistant to corrosion caused by chlorine gas and chlorinated media as well as many oxidizing mineral and organic acids, sea water etc. ▪ Corrosion from ultrapure water ▪ Not to be used in a sulfur-containing atmosphere

1) Can be used to a limited extent up to 800 °C (1472 °F) for low compressive loads and in non-corrosive media. Please contact your Endress+Hauser sales team for further information.

Process connection

The process connection is the means of connecting the thermometer to the process. The following process connections are available:

T53

Thread	Version
 A0026110	NPT thread
	NPT 1/2"
	NPT 3/4"
 A0026111	NPS for socket weld
	NPS 3/4"
 A0026108	NPS for weld-in
	NPS 3/4"
	NPS 1"

T54

Flange	
A0010471	
For detailed information on the flange dimensions refer to the following flange standard: ANSI/ASME B16.5	The flange material must be the same as of the stem of the thermowell.

T55

Type	Thermowell connection	Extension neck lengths in mm (in)
	Type N	25.4 mm (1 in)
	Type NUN	101.6 mm (4 in) 177.8 mm (7 in)

A0026181


Housing


Terminal heads

All terminal heads have an internal shape and size in accordance with DIN EN 50446, flat face and a thermometer connection with a 1/2" NPT thread. All dimensions in mm (in). Specifications without head transmitter installed. For ambient temperatures with head transmitter installed, see the 'Environment' section. → 8



As a special feature, Endress+Hauser offers terminal heads with optimized terminal accessibility for easy installation and maintenance.


Some of the specifications listed below may not be available on this product line.

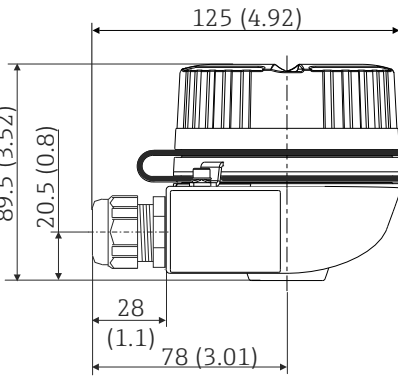TA30H	Specification
 <p style="text-align: right; font-size: small;">A0009832</p>	<ul style="list-style-type: none"> ▪ Flameproof (XP) version, explosion-protected, captive screw cap, available with one or two cable entries ▪ Protection class: IP 66/68 ▪ Temperature: -50 to +150 °C (-58 to +302 °F) for rubber seal without cable gland (observe max. permitted temperature of cable gland!) ▪ Material: aluminum; polyester powder coated ▪ Thread: ½" NPT, ¾" NPT, M20x1.5, G½" ▪ Extension neck/thermowell connection: ½" NPT ▪ Color of head: blue, RAL 5012 ▪ Color of cap: gray, RAL 7035 ▪ Weight: approx. 640 g (22.6 oz)

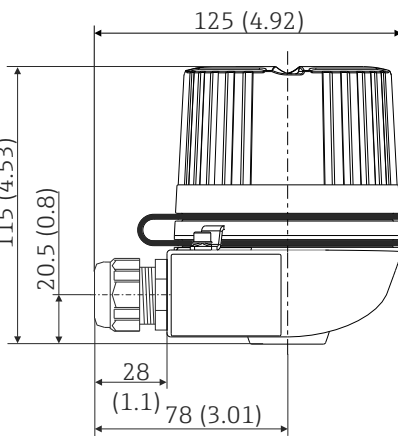TA30H with display window in cover	Specification
 <p style="text-align: right; font-size: small;">A0009831</p>	<ul style="list-style-type: none"> ▪ Flameproof (XP) version, explosion-protected, captive screw cap, available with one or two cable entries ▪ Protection class: IP 66/68 ▪ Temperature: -50 to +150 °C (-58 to +302 °F) or rubber seal without cable gland (observe max. permitted temperature of cable gland!) ▪ Material: aluminum; polyester powder coated ▪ Thread: ½" NPT, ¾" NPT, M20x1.5, G½" ▪ Extension neck/thermowell connection: ½" NPT ▪ Color of head: blue, RAL 5012 ▪ Color of cap: gray, RAL 7035 ▪ Weight: approx. 860 g (30.33 oz) ▪ Head transmitter optionally available with TID10 display

Field housings

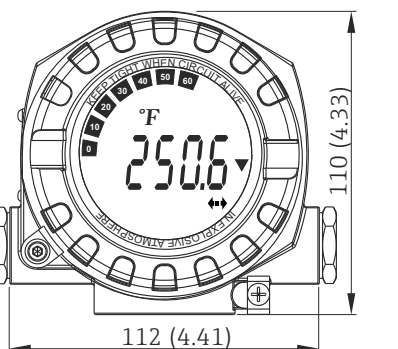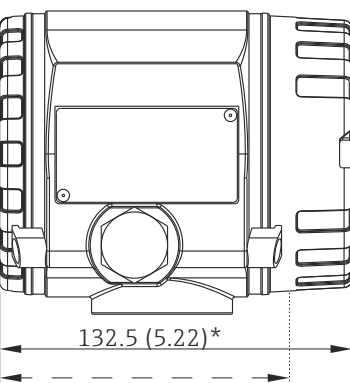Temperature field transmitter iTEMP TMT162	
	 <p style="text-align: right; font-size: small;">A0024608</p>
<p>* Dimensions without display = 112 mm (4.41 in)</p>	
<ul style="list-style-type: none"> ▪ Separate electronics compartment and connection compartment ▪ Protection class: IP67, NEMA type 4x ▪ Material: Die-cast aluminum housing AlSi10Mg with powder coating on polyester base, 316L ▪ Display rotatable in 90° increments ▪ Cable entry: 2x ½" NPT ▪ Brilliant blue backlit display with ease of visibility in bright sunshine or pitch darkness ▪ Gold plated terminals to avoid corrosion and additional measurement errors 	

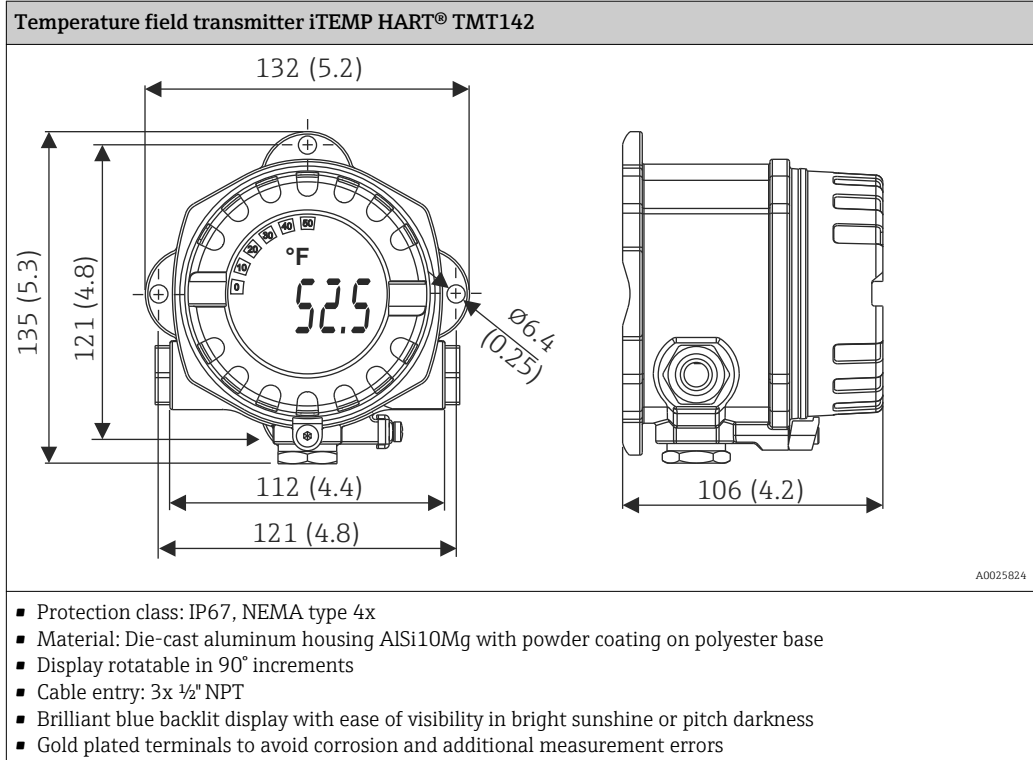

Certificates and approvals

CE Mark The device meets the legal requirements of the EC directives if applicable. Endress+Hauser confirms that the device has been successfully tested by applying the CE mark.

Other standards and guidelines

- IEC 60529: Degree of protection of housing (IP code)
- IEC 61010-1: Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 1: General requirements
- IEC 60584 and ASTM E230/ANSI MC96.1: Thermocouples
- ASTM E839: American society for testing and materials, standard test methods for sheathed thermocouples and sheathed thermocouple material
- ASTM E1129/E1129M-98: Standard specification of thermocouple connectors
- ASTM E1684: Standard specification for miniature thermocouple connectors
- NEMA - ANSI/NEMA 250: Enclosures for Electrical Equipment
- ASME PTC 19.3 TW2010: Performance test codes
- CSA Standard C22.2 (No. 25, no. 30, no. 157, no. 213, no. 1010.1): Requirements for hazardous locations & safety requirements for electrical equipment for measurement, control and laboratory use
- FM Standards (Class No. 3600, 3611, 3615, 3810): Requirements for hazardous locations & electrical and electronic test, measuring and process control equipment

UL Temperature transmitters UL recognized components under Category Code.file number QUYX8.E225237 and QUYX2.E225237

CSA/FM

T53, T54 with blue connection head or field housing

FM XP DIP Class I, II, III Div. 1+2, Grp. A-G

FM XP NI DIP Class I, II, III Div. 1+2, Grp. A-G

CSA XP DIP Class I, II, III Div. 1+2, Grp. A-G

CSA XP NI DIP Class I, II, III Div. 1+2, Grp. A-G

FM/CSA XP DIP Class I, II, III Div. 1+2, Grp. A-G

FM/CSA XP NI DIP Class I, II, III Div. 1+2, Grp. A-G

CSA General Purpose

T55 with blue connection head or field housing

FM XP DIP Class I, II, III Div. 1+2, Grp. A-G

FM XP NI DIP Class I, II, III Div. 1+2, Grp. A-G

CSA XP DIP Class I, II, III Div. 1+2, Grp. B-G

CSA XP NI DIP Class I, II, III Div. 1+2, Grp. B-G

FM/CSA XP DIP Class I, II, III Div. 1+2, FM Grp. A-G, CSA Grp. B-G

FM/CSA XP NI DIP Class I, II, III Div. 1+2, FM Grp. A-G, CSA Grp. B-G

CSA General Purpose

Ordering information

Product Configurator









Product Configurator - the tool for individual product configuration

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser website: www.endress.com → Select country → Instruments → Select device → Product page function: Configure this product
- From your Endress+Hauser Sales Center: www.endress.com/worldwide
- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop


Accessories

Various accessories, which can be ordered with the device or subsequently from Endress+Hauser, are available for the device. Detailed information on the order code in question is available from your local Endress+Hauser sales center or on the product page of the Endress+Hauser website: www.endress.com.



Communication-specific accessories		
Configuration kit TXU10	Configuration kit for PC-programmable transmitter with setup software and interface cable for PC with USB port Order code: TXU10-xx	
Commubox FXA291	Connects Endress+Hauser field devices with a CDI interface (= Endress+Hauser Common Data Interface) and the USB port of a computer or laptop.  For details, see "Technical Information" TI00405C	
HART Loop Converter HMX50	Is used to evaluate and convert dynamic HART process variables to analog current signals or limit values.  For details, see "Technical Information" TI00429F and Operating Instructions BA00371F	
Wireless HART adapter SWA70	Is used for the wireless connection of field devices. The WirelessHART adapter can be easily integrated into field devices and existing infrastructures, offers data protection and transmission safety and can be operated in parallel with other wireless networks with minimum cabling complexity.  For details, see Operating Instructions BA061S	
Fieldgate FXA320	Gateway for the remote monitoring of connected 4-20 mA measuring devices via a Web browser.  For details, see "Technical Information" TI00025S and Operating Instructions BA00053S	
Fieldgate FXA520	Gateway for the remote diagnostics and remote configuration of connected HART measuring devices via a Web browser.  For details, see "Technical Information" TI00025S and Operating Instructions BA00051S	
Field Xpert SFX100	Compact, flexible and robust industry handheld terminal for remote configuration and for obtaining measured values via the HART current output (4-20 mA).  For details, see Operating Instructions BA00060S	

Service-specific accessories

Accessories	Description
Applicator	Software for selecting and sizing Endress+Hauser measuring devices: <ul style="list-style-type: none"> Calculation of all the necessary data for identifying the optimum measuring device: e.g. pressure loss, accuracy or process connections. Graphic illustration of the calculation results Administration, documentation and access to all project-related data and parameters over the entire life cycle of a project. Applicator is available: <ul style="list-style-type: none"> Via the Internet: https://wapps.endress.com/applicator On CD-ROM for local PC installation.
Configurator ^{+temperature}	Software for selecting and configuring the product depending on the measuring task, supported by graphics. Includes a comprehensive knowledge database and calculation tools: <ul style="list-style-type: none"> For temperature competence Quick and easy design and sizing of temperature measuring points Ideal measuring point design and sizing to suit the processes and needs of a wide range of industries The "Configurator" is available: On request from your Endress+Hauser sales office on a CD-ROM for local PC installation.

W@M	<p>Life cycle management for your plant</p> <p>W@M supports you with a wide range of software applications over the entire process: from planning and procurement, to the installation, commissioning and operation of the measuring devices. All the relevant device information, such as the device status, spare parts and device-specific documentation, is available for every device over the entire life cycle.</p> <p>The application already contains the data of your Endress+Hauser device. Endress+Hauser also takes care of maintaining and updating the data records.</p> <p>W@M is available:</p> <ul style="list-style-type: none"> ■ Via the Internet: www.endress.com/lifecyclemanagement ■ On CD-ROM for local PC installation.
FieldCare	<p>FDT-based plant asset management tool from Endress+Hauser.</p> <p>It can configure all smart field units in your system and helps you manage them. By using the status information, it is also a simple but effective way of checking their status and condition.</p> <p> For details, see Operating Instructions BA00027S and BA00059S</p>

System components

Accessories	Description
Process display unit RIA15	<p>The display unit records the analog measuring signal from the head transmitter and shows this on the display. The LC display shows the current measured value in digital form and as a bar graph indicating a limit value violation. The process display unit is integrated in the 4 to 20 mA or HART® loop and is powered directly from the current loop. Optionally up to four of a sensor's HART® process variables can be displayed.</p> <p> For details, see the "Technical Information" document TI01043K/09/EN</p>
RN221N	<p>Active barrier with power supply for safe separation of 4-20 mA standard signal circuits. Offers bidirectional HART transmission.</p> <p> For details, see "Technical Information" TI00073R and Operating Instructions BA00202R</p>

Documentation

Brief operating instructions

- T53 Explosion proof TC assembly in thermowell, KA00243R/24/AE
- T54 Explosion proof TC assembly in flanged thermowell, KA00244R/24/AE
- T55 Explosion proof TC assembly, spring loaded, KA00245R/24/AE

Technical Information

- Temperature transmitter iTEMP HART® TMT82, TI01010T/09/EN
- Temperature transmitter iTEMP PROFIBUS PA TMT84, TI00138R/09/EN
- Temperature field transmitter iTEMP TMT162, TI00086R/09/EN
- Temperature field transmitter iTEMP HART® TMT142, TI00107R/09/EN
- Temperature head transmitter iTEMP Pt TMT180, TI00088R/09/EN
- Temperature head transmitter iTEMP PCP TMT181, TI00070R/09/EN
- Temperature head transmitter iTEMP HART® TMT182, TI00078R/09/EN



www.addresses.endress.com
