

HD404T

- ▶ [GB] Very low pressure transmitter



[GB] Description

The series of transmitters HD404T measure relative pressures with reference to the atmosphere or differential pressure in the range from 50 to 1000 Pa (0.2" H₂O to 5" H₂O). HD404T transmitters use a silicon "micro-machined" temperature compensated type of sensor which has an excellent linearity, repeatability and stability over time. The output signal of the sensor is amplified and converted into a standard analogical output in current (4-20mA) and in voltage (0-10V), that can be transmitted over long distances with a high noise immunity.

For each model it is possible to choose between two measurement ranges by a dip switch in order to select the full scale suitable for each application.


Usually the low pressure transmitters are subject to the orientation with which they are mounted. In the series HD404T is available a special auto-zero circuit, which periodically equalize the differential pressure at the input of the sensor and corrects the offset; the transmitters provided with this circuit are insensitive to the mounting position. In addition, the auto-zero circuit compensates aging and the deviation of the zero to temperature changes: virtually eliminates maintenance.

It's available the (L) "display" option, in which the pressure is visualized on a display with 4 digits in the selected measurement unit.

The (SR) "square root" is especially useful if the transmitter is connected to a Pitot or Darcy tube, as the output is directly proportional to the speed of airflow. The SR version with L option also allows to display, in addition to the pressure measured, the speed of airflow calculated. The SR version is configurable by the user by connecting the transmitter to a PC and sending serial commands via a standard communication software. It is possible to set the coefficient of the Pitot or Darcy tube used, the parameters for the calculation of the speed (airflow temperature, barometric pressure, differential static pressure in the duct), the speed unit of measurement (m/s or ft/s) and the speed full scale for the analog output.

The transmitters are ready to be used and are supplied already calibrated by the manufacturer on 3 points.

Typical applications for HD404T series are clean room monitoring, filters' control, flow measures (in line with the Pitot tube), the air conditioning control and the ventilation one.

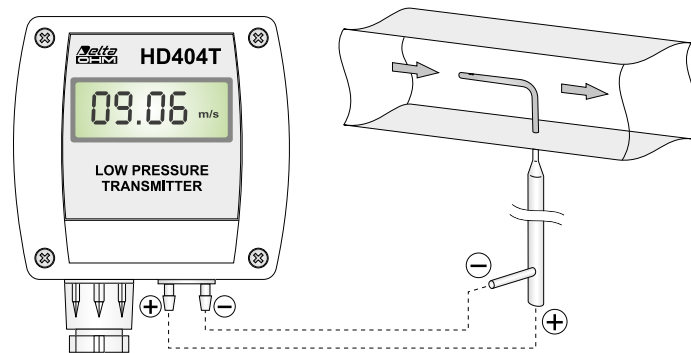

Transmitter with SR option connected to a Pitot tube

TECHNICAL COMMON FEATURES @ 20°C and 24Vdc

Sensor	Piezoresistive
Measurement range	from 0...50 Pa (0...0,2" H ₂ O) to 0...1000 Pa (0...4" H ₂ O) relative and differential (see table) For the SR models, the speed measurement ranges depend on the tube constant, the temperature and the pressure (see table)
Output signal	0...10 Vdc R _L > 10 kΩ and 4...20 mA R _L < 500 Ω
Accuracy	It depends on the model (see table)
Response time	1 s (fast) or 4 s (slow) selectable through jumper
Over-pressure limit	25 kPa
Compatible media	Only air and non-aggressive gases
Power supply	24 Vac ± 10% or 16...40 Vdc
Absorption	< 1 W
Pressure fit	With Ø 5 mm flexible tube
Electrical connections	Terminal board with screws, max 1.5 mm ² , PG9 conduit for input cable
Working conditions	-10...+60 °C (-5...+50 °C for models with auto-zero AZ), 0...95% RH
Storage temperature	-20...+70 °C
Case sizes	80 x 84 x 44 mm
Degree of protection	IP67

INSTALLATION

In each one of the models, sensor and electronics are contained in a sturdy plastic case with an IP67 protection degree. Opening the lid are available 3 mm diameter holes that let you set the base of the transmitter directly to a panel or a wall.





HD404T1PG-AZ-L



HD404T3PD



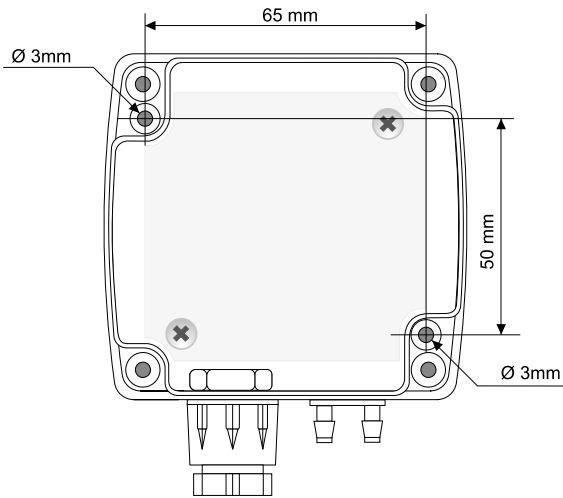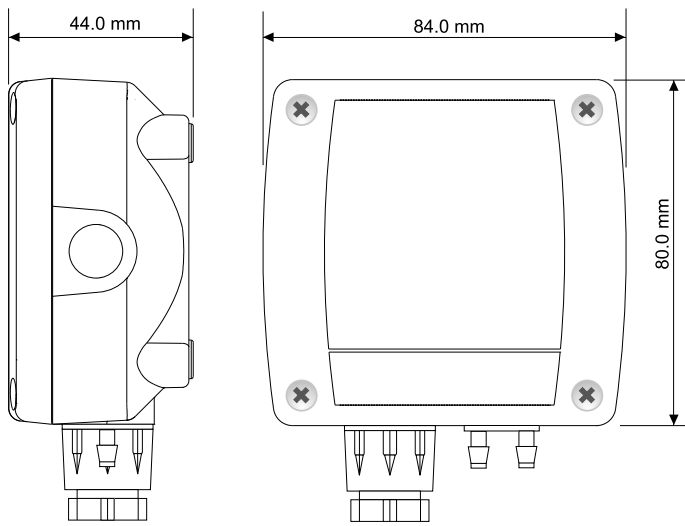


HD404T can be mounted in any position, but typically on a vertical wall with the pressure inlets facing downwards. The gap from zero due to the mounting position can be compensated by using the CAL ZERO button. The procedure to follow for manual calibration of zero is the following:


- Make sure that the transmitter is powered by at least 1 hour;
- Disconnect both tubes from the + and – pressure inlets;
- Press CAL ZERO button until the red LED starts flashing;
- When the red led turns off, the zero procedure is completed and you can reconnect the tubes to pressure fits.

It is recommended to perform the auto-zero procedure at least once a year under normal working conditions.

In models with auto-zero circuit (AZ option), this procedure is regularly performed every 15 minutes without disconnecting the hoses from pressure taps. During the reset, which takes about 4 seconds, the analog outputs and the display will remain frozen at the measured value. Models with auto-zero have virtually no need for maintenance.



CAL ZERO button and configuration jumpers

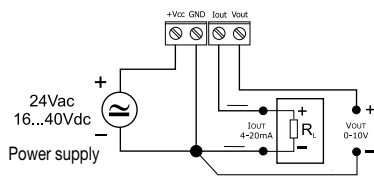

Electrical connections

CONFIGURATION

Setting the output range: the RANGE jumper allows you to choose one of this output ranges: with LOW you choose the low range, with HIGH the extended range.

Response time setting: the FAST SLOW jumper allows you to choose the response time of the transmitter: in FAST position the measurement is integrated over 1 s, while in SLOW position it is integrated over 4 s. SLOW position is recommended if there are conditions of turbulence or disruption of air flow.

Setting of the parameters in the SR versions: the transmitters are factory calibrated. To change the default settings, proceed as follows:

- Connect the transmitter COM AUX serial output to the RS232 (through the **RS27** cable) or USB (through the **CP27** cable) port of the pC. If the CP27 cable is used, install the related USB drivers in the PC.
- In the PC, run a serial communication software (e.g. Hyperterminal), set the baud rate to 115200 and the communication parameters to 8N2.
- To change the display configuration (commands O3E, O3D, O4E, O4D, O5E, O5D) it is necessary to send the CAL START command to enter the configuration mode. It is not necessary to send the CAL START command to change the parameters related to the speed measurement (tube coefficient, temperature, pressure, full scale for the analog output).
- Send the commands in the following table to set or read the configuration parameters of the transmitter:

Command	Reply	Description
O3E	&	Show alternately speed and pressure on display
O3D	&	Disable the alternating display of speed and pressure
O4E	&	Automatic change of speed resolution on the display (0,1 □ 0,01) according to the measured value ⁽¹⁾
O4D	&	Fixed centesimal speed resolution on display ⁽¹⁾
O5E	&	Set ft/s as speed unit of measurement on display <i>Note: the symbol ft/s does not appear on display</i>
O5D	&	Sets m/s as speed unit of measurement on display (default)
CK n.n...	&	Set the Pitot or Darcy tube coefficient to the value n.n... The value must be between 0.6 and 1.2 (default = 1.0)
RK	n.nnnn	Read the value of the tube coefficient set in the transmitter
CB nnnn.nn...	&	Set the barometric pressure to the value nnnn.nn... mbar The value must be between 500 and 1500 mbar (default = 1013.25 mbar)
RB	nnnn.nnn	Read the value of the barometric pressure in mbar set in the transmitter
CT n...	&	Set the airflow temperature in tenths of °C (default = 160 ⇒ 16.0 °C) The value must be between -999 (⇒ -99.9 °C) and 2000 (⇒ 200.0 °C)
RT	n...	Read the value of the temperature, in tenths of °C, set in the transmitter
CP nnnn...	&	Set the differential static pressure ⁽²⁾ in mbar (default = 0)
RP	nnnn...	Read the value of the differential static pressure ⁽²⁾ set in the transmitter
CS nnnn	&	Set the full scale speed, in hundredths of m/s, for the analog output (default = see table). The max settable value is 10000 (⇒ 100.00 m/s)
RS	nn.nn	Read the speed full scale value, in m/s, for the analog output
SV	nn.nn	Print the max measurable speed according to the transmitter full scale pressure and the parameters value set. The value is in the speed unit of measurement set in the transmitter.

⁽¹⁾ The speed is calculated from the pressure measure through a quadratic relationship. For this reason, the speed resolution is lower for low pressure values measured and the change of the speed measurement on the display appears rather discontinuous if the fixed centesimal resolution is used. If a more uniform speed change on display is desired, enable the automatic change of the speed resolution according to the measured value.

⁽²⁾ The differential static pressure is equal to the difference between the absolute static pressure inside the duct and the barometric pressure. The differential static pressure is zero if the duct is open (in contact with the atmosphere), while it can be different from zero in case of closed ducts.

To exit the configuration mode after sending the CAL START command, send the CAL END command (the transmitter automatically exits the configuration mode after 5 minutes from the last command sent).

DISPLAY

Models with L suffix are provided with LCD display with 4 digits.

Pressure display resolution:

50 - 100 - 250 - 500 Pa	→	0.5 Pa
1000 Pa	→	1 Pa
5 - 10 - 25 - 50 mmH ₂ O	→	0.05 mmH ₂ O
100 mmH ₂ O	→	0.1 mmH ₂ O
0.2 - 0.4 - 1 - 2 - 4 inchH ₂ O	→	0.002 inchH ₂ O

Speed display resolution in the SR models: for all the ranges, the speed resolution can be centesimal fixed or with automatic change from decimal to centesimal according to the measured value. The selection between the two options is made via the serial commands O4E and O4D.

Error reporting:

Undr	→ it appears if the measured value is smaller than the minimum value that can be measured
OvEr	→ it appears if the measured value exceeds the maximum value that can be measured
CAL Error	→ it appears when the zero calibration is finished if the maximum offset value that can be corrected is exceeded.

SPEED FULL SCALE IN THE SR MODELS


In the SR models, the maximum speed measurable depends on: the coefficient of the tube used, the temperature, the barometric pressure and the differential static pressure set in the transmitter. The serial command SV allows to read the maximum speed measurable according to the parameters setting. The following table shows the maximum speed measurable by the various models with the values of the parameters preset by the factory: tube coefficient **K = 1.0**, temperature **T = 16.0°C**, barometric pressure **Patm = 1013.25 mbar**, differential static pressure **Ps = 0**.

MODEL	MAX SPEED MEASURABLE (@ K = 1, T = 16°C, Patm = 1013.25 mbar, Ps = 0)		DEFAULT FULL SCALE FOR THE ANALOG OUTPUT (changeable with the CS command)
	LOW	HIGH	
HD404T1PG-AZ(-L)-SR	9,06 m/s	12,82 m/s	10 m/s
HD404T2PG-AZ(-L)-SR	12,82 m/s	20,27 m/s	20 m/s
HD404T3PG(-AZ)-L-SR	20,27 m/s	28,67 m/s	25 m/s
HD404T4PG(-AZ)-L-SR	28,67 m/s	40,55 m/s	40 m/s
HD404T1MG-AZ(-L)-SR	8,98 m/s	12,70 m/s	10 m/s
HD404T2MG-AZ(-L)-SR	12,70 m/s	20,08 m/s	20 m/s
HD404T3MG(-AZ)-L-SR	20,08 m/s	28,39 m/s	25 m/s
HD404T4MG(-AZ)-L-SR	28,39 m/s	40,16 m/s	40 m/s
HD404T1IG-AZ(-L)-SR	9,05 m/s	12,80 m/s	10 m/s
HD404T2IG-AZ(-L)-SR	12,80 m/s	20,24 m/s	20 m/s
HD404T3IG(-AZ)-L-SR	20,24 m/s	28,62 m/s	25 m/s
HD404T4IG(-AZ)-L-SR	28,62 m/s	40,48 m/s	40 m/s


SUMMARY TABLE OF MODELS AND PRECISION

MODEL	RANGE		ACCURACY %F.S. RANGE HIGH (0...+50 °C)	LONG TERM STABILITY (1 YEAR)	
	LOW	HIGH		AZ	NO AZ
	Pa				
HD404T1PG-AZ(-L)-SR	0...50 Pa	0...100 Pa	±3%	≤±1Pa	
HD404T2PG-AZ(-L)-SR	0...100 Pa	0...250 Pa	±1.5%	≤±1Pa	
HD404T3PG(-AZ)-L-SR	0...250 Pa	0...500 Pa	±1%	≤±1Pa	≤±8Pa
HD404T4PG(-AZ)-L-SR	0...500 Pa	0...1000 Pa	±1%	≤±1Pa	≤±8Pa
HD404T1PD-AZ(-L)	-50...+50 Pa	-100...+100 Pa	±1.5%	≤±1Pa	
HD404T2PD-AZ(-L)	-100...+100 Pa	-250...+250 Pa	±1%	≤±1Pa	
HD404T3PD(-AZ)-L	-250...+250 Pa	-500...+500 Pa	±1%	≤±1Pa	≤±8Pa
HD404T4PD(-AZ)-L	-500...+500 Pa	-1000...+1000 Pa	±1%	≤±1Pa	≤±8Pa
mmH₂O					
HD404T1MG-AZ(-L)-SR	0...5 mmH ₂ O	0...10 mmH ₂ O	±3%	≤±0.1mmH ₂ O	
HD404T2MG-AZ(-L)-SR	0...10 mmH ₂ O	0...25 mmH ₂ O	±1.5%	≤±0.1mmH ₂ O	
HD404T3MG(-AZ)-L-SR	0...25 mmH ₂ O	0...50 mmH ₂ O	±1%	≤±0.1mmH ₂ O	≤±0.8mmH ₂ O
HD404T4MG(-AZ)-L-SR	0...50 mmH ₂ O	0...100 mmH ₂ O	±1%	≤±0.1mmH ₂ O	≤±0.8mmH ₂ O
HD404T1MD-AZ(-L)	-5...+5 mmH ₂ O	-10...+10 mmH ₂ O	±1.5%	≤±0.1mmH ₂ O	
HD404T2MD-AZ(-L)	-10...+10 mmH ₂ O	-25...+25 mmH ₂ O	±1%	≤±0.1mmH ₂ O	
HD404T3MD(-AZ)-L	-25...+25 mmH ₂ O	-50...+50 mmH ₂ O	±1%	≤±0.1mmH ₂ O	≤±0.8mmH ₂ O
HD404T4MD(-AZ)-L	-50...+50 mmH ₂ O	-100...+100 mmH ₂ O	±1%	≤±0.1mmH ₂ O	≤±0.8mmH ₂ O
inchH₂O					
HD404T1IG-AZ(-L)-SR	0...0.2 inchH ₂ O	0...0.4 inchH ₂ O	±3%	≤±0.004inchH ₂ O	
HD404T2IG-AZ(-L)-SR	0...0.4 inchH ₂ O	0...1 inchH ₂ O	±1.5%	≤±0.004inchH ₂ O	
HD404T3IG(-AZ)-L-SR	0...1 inchH ₂ O	0...2 inchH ₂ O	±1%	≤±0.004inchH ₂ O	≤±0.04inchH ₂ O
HD404T4IG(-AZ)-L-SR	0...2 inchH ₂ O	0...4 inchH ₂ O	±1%	≤±0.004inchH ₂ O	≤±0.04inchH ₂ O
HD404T1ID-AZ(-L)	-0.2...0.2 inchH ₂ O	-0.4...0.4 inchH ₂ O	±1.5%	≤±0.004inchH ₂ O	
HD404T2ID-AZ(-L)	-0.4...0.4 inchH ₂ O	-1...+1 inchH ₂ O	±1%	≤±0.004inchH ₂ O	
HD404T3ID(-AZ)-L	-1...+1 inchH ₂ O	-2...+2 inchH ₂ O	±1%	≤±0.004inchH ₂ O	≤±0.04inchH ₂ O
HD404T4ID(-AZ)-L	-2...+2 inchH ₂ O	-4...+4 inchH ₂ O	±1%	≤±0.004inchH ₂ O	≤±0.04inchH ₂ O

The following graphs show the change of the maximum measurable speed value (normalized to 1 for T=16.0°C and Patm=1013.25 mbar) with the change of the temperature and barometric pressure.

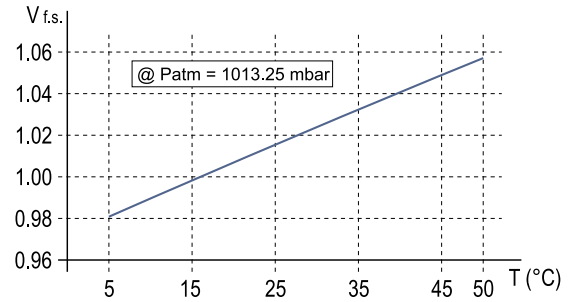


Change of the full scale speed with the temperature at constant barometric pressure

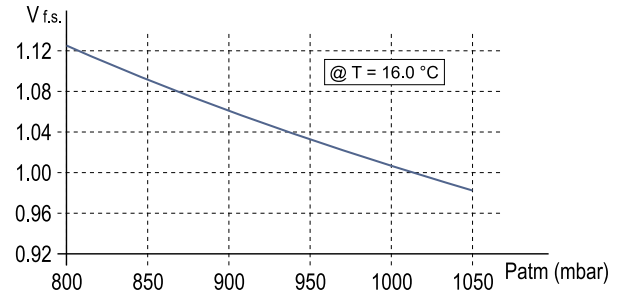

Change of the full scale speed with the barometric pressure at constant temperature

In the SR models, the serial command "CS nnnn" allows to associate to the full scale of the analog output a speed value chosen by the user, even if different from the maximum value actually measurable by the transmitter.

ORDERING CODES

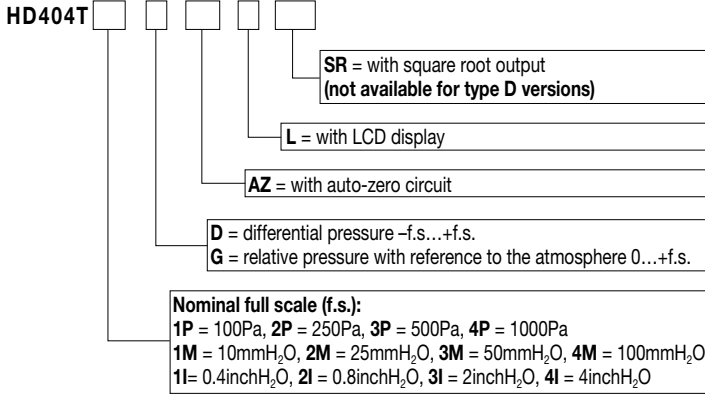

ACCESSORIES


Supplied:

- N°1 piece of Ø3.2/Ø6.4 silicone tube 2m long
- N°2 HD434T.5 plastic fittings


Under request:

- HD3719** Flow offtake for square or cylindrical channel. Two pieces of Ø3.2/Ø6.4 tube 1m long.
- HD3721** Flow offtake for plastic material cylindrical channel. Two pieces of Ø3.2/Ø6.4 tube 1m long.
- RS27** RS232 null-modem serial connection cable with 9-pole SubD connector for the PC and 3-pole connector for the COM AUX port of the instrument.
- CP27** Serial connection cable with USB connector for the PC and 3-pole connector for the COM AUX port of the instrument. The cable has a built-in USB/RS232 converter and connects the transmitter directly to the USB port of the PC.

AP3719 duct probe

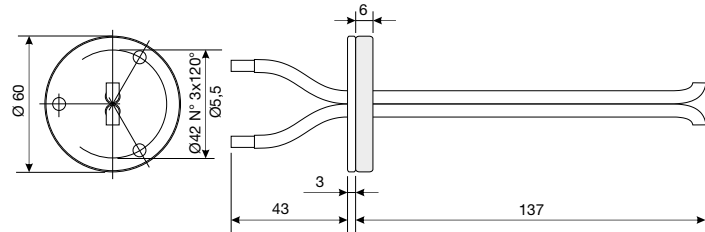


AP3721 duct probe

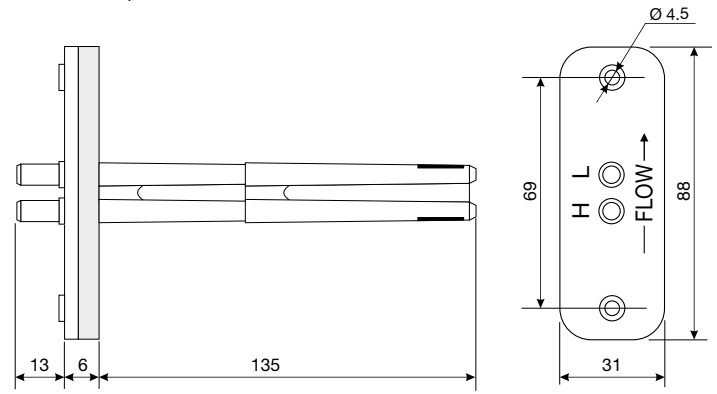



PITOT TUBES

Stainless steel Pitot tubes for air speed measurement, supplied with silicone tube Ø6mm external, Ø4mm internal, length 2m.

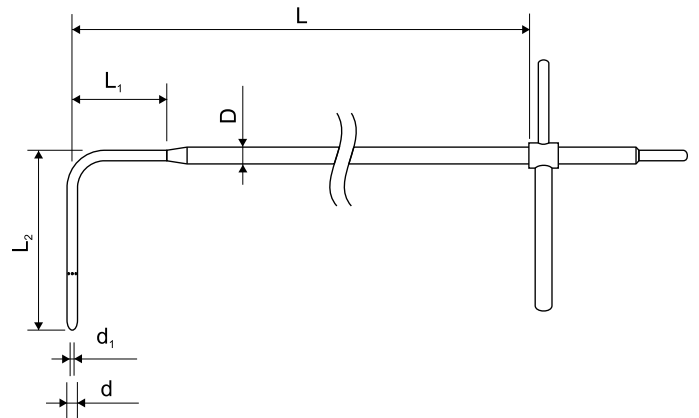

	d mm	d ₁ mm	D mm	L mm	L ₁ mm	L ₂ mm	Temp. °C	Material
T1-300	3	1	6	300	30	72	0...600°C	AISI 316
T2-400	5	2	8	400	45	120		
T2-600	5	2	8	600	45	120		
T3-500	8	3,2	8	500	---	192		
T3-800	8	3,2	8	800	---	192		
T4-500	10	4,0	10	500	---	240		
T4-800	10	4,0	10	800	---	240		
T4-1000	10	4,0	10	1000	---	240		

Examples of connection with HD9022 indicator regulator

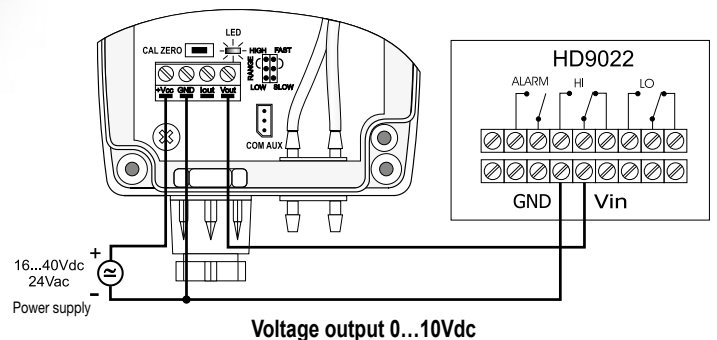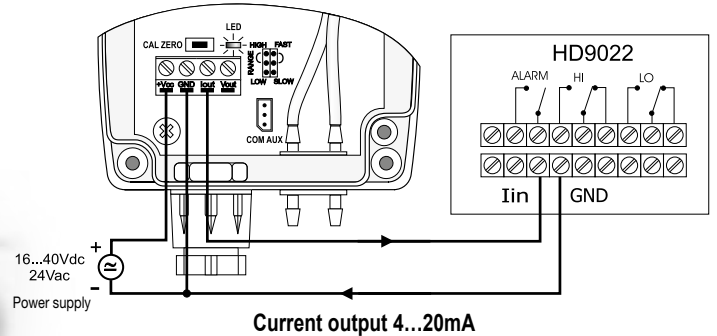

Manufacture of portable and bench top scientific instruments
Current loop and voltage output transmitters and regulators
Temperature - Humidity, Dew point - Pressure - CO₂
Air speed - Light - Optical Radiation - Acoustics - Vibration
pH - Conductivity - Dissolved Oxygen - Turbidity
Elements for weather stations - Thermal Microclimate



LAT N° 124 Signatory of EA, IAF and ILAC Mutual Recognition Agreements
Temperature - Humidity - Pressure - Air speed
Photometry/Radiometry - Acoustics

CE CONFORMITY

- **Safety:** EN61000-4-2, EN61010-1 Level 3
- **Electrostatic discharge:** EN61000-4-2 Level 3
- **Electric fast transients:** EN61000-4-4 Level 3, EN61000-4-5 Level 3
- **Voltage variations:** EN61000-4-11
- **Electromagnetic interference susceptibility:** IEC1000-4-3
- **Electromagnetic interference emission:** EN55022 class B

