

# DG2

## Dew-Point Generator



### Technical Specifications


Mixing stages	2 stage
Humidity range	-75 to +20°Cdp (-103 to +68°Fdp)
Gas supply	8 NI/min (17 scfh) -1 air @ 1 barg (11 psig) and -75°Cdp (-103°Fdp)
Gas output	1 to 5 NI/min (2.1 to 10.6 scfh) air @ 0.5 to 1 barg (7 to 14 psig)
Filter	Particulate filter
Saturator	Polycarbonate and porous polyethylene sinter
Heating	Finned heating elements, 500 watts, fan circulation
Power supply	220 to 240 V, 50Hz or 100 to 120 V; 60Hz
Storage temperature	+5 to +40°C (+41 to +104°F) (with saturators empty)
Operating temperature	+18 to +24°C (+64 to +75°F)
Enclosure size	19" sub-rack x 12U high x 400mm (15.8") deep
Weight	20kg (44lbs)

The DG2 has two stages of gas-flow mixing which allow it to generate dew points down to -75°Cdp (-103°Fdp). The great strengths of the DG2 are its ease of use and its flexibility in manually generating an accurate target dew point by fine tuning the gas mix via its flow metering valves. Infinite mixing is achievable within its working range.

### Highlights

- Operation range of -75 to +20°Cdp (-103 to +68°Fdp) suiting the vast majority of calibration requirements
- Simple operation through manual flow mixing
- Flexibility in generating precise target dew-point temperature
- Generated output responds quickly to a change of set point
- Stable humidity generation

### Dimensions

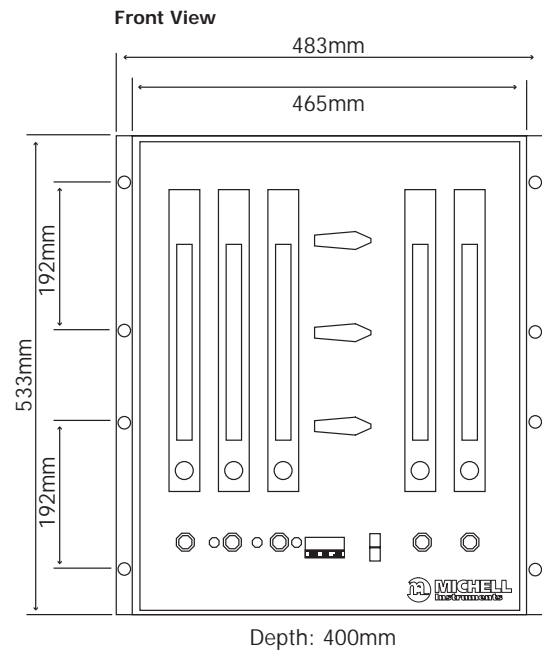

# DG3

## Dew-Point Generator



### Technical Specifications


<b>Mixing stages</b>	1 stage
<b>Humidity range</b>	-40 to +20°Cdp (-40 to +68°Fdp)
<b>Gas supply</b>	6 NI/min (12.7 scfh) air @ 0.75 barg (11 psig) and -75°Cdp (-103°Fdp)
<b>Gas output</b>	1 to 5 NI/min (2.1 to 10.6 scfh) air @ 0.5 to 1 barg (7 to 15 psig)
<b>Filter</b>	Particulate filter
<b>Saturator</b>	Polycarbonate and porous polyethylene sinter
<b>Heating</b>	Finned heating elements, 500 watts, fan circulation
<b>Power supply</b>	220 to 240 V, 50Hz or 100 to 120 V; 60Hz
<b>Storage temperature</b>	+5 to +40°C (+41 to +104°F) (with saturators empty)
<b>Operating temperature</b>	+18 to +24°C (+64 to +75°F)
<b>Enclosure size</b>	19" sub-rack x 6U high x 340mm (13.4") deep
<b>Weight</b>	9kg (20lbs)

The DG3 is our entry-level, single-stage mixing humidity generator. It is operated by manually mixing the two gas streams using flow control valves. The DG3 provides flows up to 5 NI/min (10.6 scfh) and generates dew points ranging from -40 to +20°Cdp (-40 to +68°Fdp). Infinite mixing is achievable within its working range.

### Highlights

- Consistently dry output over long time periods
- Full analog control of generated dew points across -40 to +20°Cdp (-40 to +68°Fdp) operating range
- Generated output responds quickly to a change of set point
- Stable humidity generation
- Compact packaging

### Dimensions

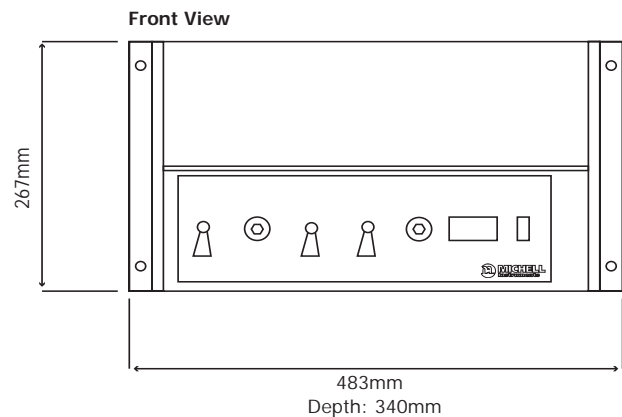

# DG4

## Dew-Point Generator



### Technical Specifications


<b>Mixing stages</b>	2 stage
<b>Humidity range</b>	-75 to +20°Cdp (-103 to +68°Fdp)
<b>Gas supply</b>	8 NI/min (16 scfh) (max) @ 0.7 barg / 11 psig and -75°Cdp (-103°Fdp)
<b>Gas output</b>	1 to 5 NI/min (2.1 to 10.6 scfh) (air @ 0.5 to 1 barg (7 to 14 psig))
<b>Filter</b>	Particulate filter
<b>Saturator</b>	Polycarbonate and porous polyethylene sinter
<b>Heating</b>	Finned heating elements, 300 watts, fan circulation
<b>Power supply</b>	220/240V, 50Hz or 100/120V; 60Hz
<b>Storage temperature</b>	+5 to +40°C (+41 to +104°F) (with saturators empty)
<b>Operating temperature</b>	+18 to +24°C (+64 to +75°F)
<b>Enclosure size</b>	19" sub-rack x 6U high x 330mm (13.4") deep
<b>Weight</b>	25kg (55lbs)

The DG4 is a two-stage push-button dew-point generator which operates in the range of -75 to +20°Cdp (-103 to +68°Fdp). It can be delivered with between 3 and 10 factory-set dew point settings, selectable from the front panel keypad. Its RS232 communication port enables further automation, particularly when used in conjunction with a UKAS certified hygrometer. The DG4 offers maximum flexibility via its pre-set values combined with optional manual mixing above -40°C (-40°F) dew point.

### Highlights

- Operation range of -75 to 20°Cdp (-103 to +68°Fdp) suiting the vast majority of calibration requirements
- Simple operation through push-button switching of set points
- Remote control via RS232 comms
- Generated output responds quickly to a change of set point
- Stable humidity generation

### Dimensions

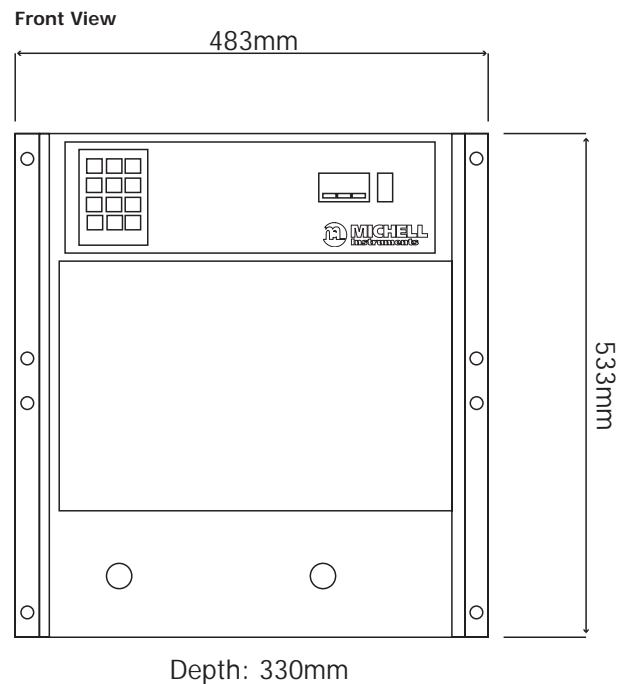

# VDS3

## Dew-Point Generator



The VDS3 is a sophisticated computer controlled dew-point generator that operates in the range of -100 to +20°Cdp (-148 to +68°Fdp). Individual three stage mass flow controllers select precise proportions of wet and pre-mixed air. Humidity injection is achieved by a liquid mass flow controller and controlled evaporation system. The Vapor Delivery System (VDS) gives repeatable and flexible control of the generated dew point and can be programmed with up to 13 presets that can be activated manually or as part of an automatic calibration program.

### Highlights


- Operation range of -100 to +20°Cdp (-148 to +68°Fdp) suiting the calibrated range of almost all dew-point sensors
- Fully automated remote control
- Mass flow controlled mixing of wet and dry flows ensures complete repeatability of set points
- Generated output responds quickly to a change of set point
- System optimised for excellent output stability ( $\pm 0.5^{\circ}\text{C}$  /  $\pm 0.9^{\circ}\text{F}$ )

### Technical Specifications

<b>Dew-point range</b>	-100 to +20°Cdp (-148 to +68°Fdp) (factory default preset values= -100, -90, -80, -70 -60, -50, -40, -30, -20, -10, 0, +10 and +20°C (+68°F))
<b>Output stability</b>	$\pm 0.5^{\circ}\text{C}$ ( $\pm 0.9^{\circ}\text{F}$ )
<b>Required gas supply</b>	30 NI/min (63.6 scfh) @ 4.8 barg (70 psig) pressure and <13.8 ppb <sub>v</sub> (-100°C / -148°F atmospheric dew point) moisture content
<b>Gas output</b>	10 NI/min (21.2 scfh) @ 0.5 barg (7.3 psig)
<b>Cable connection</b>	USB (type B) for PC Control RS485 (9 way D plug) for Setup
<b>Water reservoir</b>	Material= ABS Capacity= 1 litre
<b>Power supply</b>	220 to 240 V AC or 100 to 120 V AC 50/60 Hz
<b>Power consumption</b>	500 Watt maximum
<b>Power connector</b>	3 pin IEC
<b>Power supply fuse</b>	3A (F) quick blow
<b>Operating temperature</b>	+10 to +40°C (+50 to 104°F)
<b>Construction</b>	Painted diecast aluminum enclosure with smoked glass door. Overall dimensions = 1020 x 555 x 600mm (40 x 22 x 24") h x w x d
<b>Weight</b>	65kg (143lbs) maximum

### Dimensions

Front View

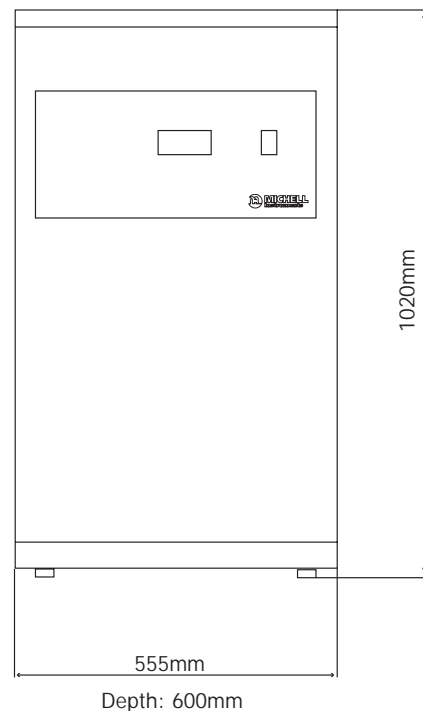

**Michell Instruments** 48 Lancaster Way Business Park, Ely, Cambridgeshire, CB6 3NW

Tel: +44 (0) 1353 658000, Fax: +44 (0) 1353 658199, Email: [info@michell.com](mailto:info@michell.com), Web: [www.michell.com/uk](http://www.michell.com/uk)

Please note: Michell Instruments adopts a continuous development program which sometimes necessitates specification changes without notice. Please contact us for latest version. Issue No: VDS3\_97336\_V1.2\_UK\_0716