

ICC1324 charge controller

Charge controller for charging systems for electric vehicle charging



Image similar



ICC1324

Certifications



Product features (depending on the variant)

- Charge controller in accordance with IEC 61851-1 (mode 3 charging)
- Master and slave operation configurable
 - Setting up charging systems with two charging points: 1 charge controller as data gateway with 4G modem and 1 charge controller as slave without 4G modem
- Dynamic load management to optimally distribute the available power among all charging points and signal the maximum power to the vehicle
- Patented residual direct current monitoring module (external RCD type A required), different cable lengths can be selected
- Integrated emergency opener for actuator control (locking/unlocking)
- Can be integrated in single- or three-phase systems up to 3x 32 A
- OCPP 1.5 and OCPP 1.6 compliant with JSON, SOAP
- Integrated 4G modem
- 3 USB interfaces:
 - 1 CONFIG interface (type B) for local configuration and installation of software updates
 - 2 USB host interfaces (type A)
- Control Pilot and Proximity Pilot communication (acc. to IEC 61851-1)
- Additional SCHUKO socket-outlet control
- Meter interface: Modbus TCP and RTU
- External Modbus interface for remote control via energy management systems
- Additional inputs and outputs for extended control of the charge controller
- Internal temperature sensor to reduce the charging current depending on the ambient temperature
- ISO 15118 Powerline Communication (PLC) for plug & charge, autocharge and load management systems
- Integrated WiFi module and two Ethernet interfaces
- Integrated DC 12 V voltage source for customer-specific applications
- Supply voltage AC 230 V

Product description

The charge controller monitors the internal hardware of charging systems such as the meter, the user interface module or the socket-outlet. It can be operated as an “always-on system” that is always connected to a mobile network. The variants with a 4G modem support the 4G mobile phone standard.

Communication with a backend system is possible via the OCPP application protocol. All specified messages in OCPP are supported as well as some vendor-specific extensions based on the DataTransfer message.

Integration tests with the backend implementations of providers (e.g. has-to-be, Virta and NewMotion) have been carried out successfully.

Refer to “Ordering details” for product variants.

Functional description

The charging system consists of an RCD type A and a contactor. These are directly connected to a type 1 or type 2 socket-outlet, or to an attached cable with a type 1 or type 2 plug.


General functions

- The charging system can be equipped with a meter. A Modbus meter is required for digital reading of the energy consumption. The Modbus RTU wires are attached directly to the charge controller. Alternatively, a meter can be connected to an Ethernet interface via Modbus TCP.
- An AC 230 V power supply is needed for operation.
- An RFID module can be used for easy user interaction.
- Power flow toward the vehicle is enabled by enabling the contactor via an integrated 230 V control relay in the charge controller.
- Using a micro SIM card (not included in the scope of delivery): The SIM card slot (available on data gateways with a 4G modem only) is located on the printed circuit board (terminal E) of the charge controller. The SIM card can have a PIN number which can be configured via the Operator tab. The APN settings for the SIM card can also be configured via the Operator tab.
- Data gateways with a 4G modem feature an SMA connector for a 4G antenna on the printed circuit board.
- For fault current detection in an AC charging system, the charge controller features an integrated residual direct current monitoring module (RDC-M) which uses an externally connected current transformer. With the integrated monitoring of the DC fault current, only an RCD type A is required in the charging system.
- Data exchange between the electric vehicle and the charging system is possible via ISO 15118 compliant Powerline Communication (PLC).
- Dynamic load management (DLM): The charge controller comes with a DLM software, which is fully usable independent of a backend connection. It detects which charging current is applied to which phase and thus avoids the occurrence of peak loads and unbalanced loads in the mains supply. Maximum number of charging points in a network: 250.
- Data management and control functionality of the charge controller:
 - Termination of the charging process after tripping of the residual current device (RCD) due to a DC fault current ≥ 6 mA.
 - Detection of critical fault currents by the RCM sensor. For the vehicle owner, this can be an early warning, provided that the charge controller is connected to an energy management system and that it supports this function.

i The charge controller with a residual direct current monitoring module (RDC-M) only works in combination with a measuring current transformer (to be ordered separately).

Dimension diagram


Dimensions in mm

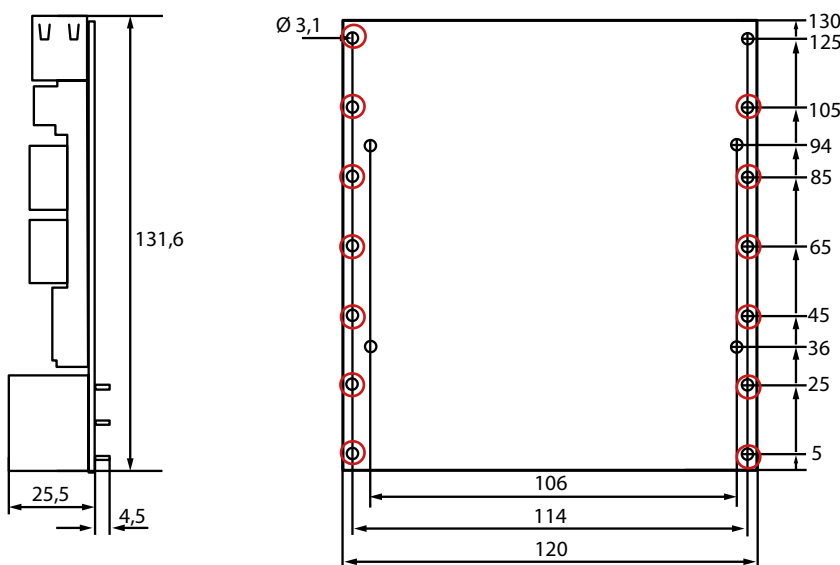

i Red marks: Possible fastening points

i Fastening recommendation:
 Fillister head screws: 4 x M 2.5
 Torque specification: 0.36 Nm

Charging system with type 2 socket-outlet

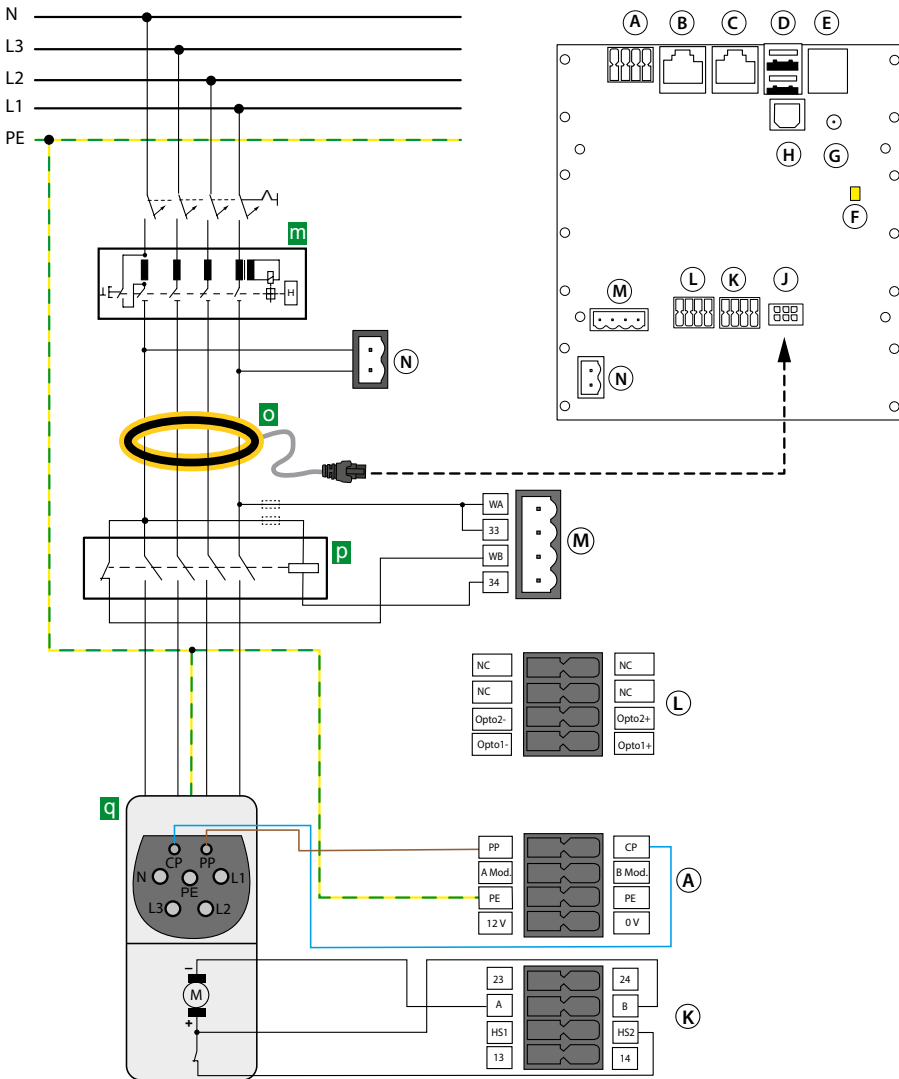

- A PE, Modbus meter, CP, PP
- B Connection Ethernet (ETH2)
- C Connection Ethernet (ETH1)
- D 2x USB type A (1, 2)
- E Micro SIM card slot (only available for variants with 4G modem)¹
- F LED service
- G Antenna socket 4G (only available for variants with 4G modem)¹
- H Configuration interface USB type B
- J Connection measuring current transformer (CT)
- K Locking, control relay GPIO
- L Optocoupler input
- M Weld check, relay for contactor control rated for 230 V/4 A
- N Power supply AC 230 V
- m** RCD type A
- o** Measuring current transformer (CT) with plug
- p** Contactor
- q** Type 2 socket-outlet

¹ Data gateways with 4G modem: ICC1324-Connect Plus and ICC1324-Connect.

CAUTION! Switching contact contactor and weld check at terminal M are only suitable for mains voltage (230 V)! Not permitted for SELV/PELV voltages.

Terminal assignment

| | | |
|---|--------|----------------------------------------------------------|
| A | 0 V | DC 12 V voltage source for customer-specific application |
| | 12 V | DC 12 V voltage source for customer-specific application |
| | PE | Input PE |
| | PE | Input PE |
| | B Mod. | Modbus meter B |
| | A Mod. | Modbus meter A |
| | CP | Control Pilot |
| M | PP | Proximity Pilot |
| | WA | Weld check input L1 |
| | 33 | Relay 33: Switching contact contactor |
| | WB | Weld check input N |
| | 34 | Relay 34: Switching contact contactor |

| | | |
|---|-----|------------------------------------------------------|
| K | 23 | Relay 23: Relay contacts GPIO (12 V) |
| | 24 | Relay 24: Relay contacts GPIO (12 V) |
| K | A | Actuator A: Locking actuator output negative |
| | B | Actuator B: Locking actuator output positive |
| K | HS2 | Actuator HS2: Locking input actuator switch |
| | HS1 | Actuator HS1: Locking 12 V output actuator switch |
| K | 14 | Relay 14: Relay contacts GPIO (12 V) |
| | 13 | Relay 13: Relay contacts GPIO (12 V) |

| | | |
|---|--------|-----------------------------------|
| L | Opto1- | Optocoupler input 1 12 V negative |
| | Opto1+ | Optocoupler input 1 12 V positive |
| | Opto2- | Optocoupler input 2 12 V negative |
| | Opto2+ | Optocoupler input 2 12 V positive |
| N | N | Neutral conductor |
| | L1 | 230 V supply (phase 1) |

i The 230 V supply (terminal N), the weld check input (terminal M, WA) and the switching contact contactor (terminal M, 33) must be connected to the same phase (L1) to ensure protection against overvoltage!

Technical data
Insulation coordination acc. to IEC 60664-1/IEC 60664-3

| | |
|-------------------------------------------|-------------------------------------------|
| Rated voltage / Pollution degree | 250 V / 2 |
| Overvoltage category | II (within terminal M) |
| Overvoltage category | III (terminal M and all other terminals) |
| Rated impulse voltage | 6 kV (terminal M and all other terminals) |
| Rated impulse voltage | 2.5 kV (within terminal M) |
| Double insulation acc. to OVC III between | terminal M and all other terminals |
| Basic insulation acc. to OVC II | within terminal M |
| Operating altitude | ≤ 2000 m AMSL |

Supply voltage AC 230 V (terminal N (L1, N))

| | |
|--------------------------------------|-----------------|
| Supply voltage range U_s | 184 V ... 264 V |
| Frequency of U_s | 50 Hz |
| maximum Power consumption | 12 W |
| average Power consumption | 6 W |
| External circuit breaker recommended | B6A |

Residual direct current monitoring module* (RDC-M, terminal J)

| | |
|-----------------|--------|
| Measuring range | 100 mA |
|-----------------|--------|

Response values:

| | |
|-----------------------------|-------------|
| Residual current I_{dc} | DC 6 mA |
| Response tolerance I_{dc} | -50 ... 0 % |

Measuring current transformer:

| | |
|-------------------------------------|----------|
| Max. Length of the connection cable | ≤ 1,47 m |
|-------------------------------------|----------|

Restart sequence value:

| | |
|---------|--------|
| DC 6 mA | < 3 mA |
|---------|--------|

* patented 6 mA DC fault current tripping

(Patents: EP 2 571 128 / US 9,397,494 / ZL 201210157968.6 / CN 103001175, EP 2 813 856)

SMA connector for 4G antenna (for ICC1324-Connect Plus variant only, terminal G)
Modem LTE Cat 1 & GSM

| | |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency bands | 800 MHz/850 MHz/900 MHz/1800 MHz/2100 MHz/2600 MHz LTE-FDD: B1/B3/B7/B8/B20/B28; WCDMA: B1/B8; GSM: B3/B8 |
| Impedance | 50 Ω |
| Data rate | GSM: GPRS: UL 85.6 kBit/s; DL 107 kBit/s EDGE: UL 236.8 kBit/s; DL 296 kBit/s UMTS: WCDMA: UL 384 kBit/s; DL 384 kBit/s DC-HSDPA: DL 42 MBit/s HSUPA: UL 5.76 MBit/s LTE: LTE FDD: UL 5 MBit/s; DL 10 MBit/s LTE TDD: UL 3.1 MBit/s; DL 8.96 MBit/s |
| Recommended antenna | TC ANT MOBILE WALL 0.5M - 2702274 |
| Max. length of the antenna cable | < 3 m |
| Max. output power | GSM850/EGSM900: 33dBm DCS1800/PCS1900: 30dBm WDM: 24dBm LTE: 23dBm |

SMA connector for LTE-M1 antenna & LTM-NB1/2 antenna (for ICC1324-Connect variant only, terminal G)
Modem LTE CAT M1/NB1 & GSM

| | |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency bands | Cat M1/Cat NB1: LTE FDD: B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B25/B26*/B28 LTE TDD: B39 (For Cat M1 Only) |
| Impedance | 50 Ω |
| Data rate | GSM: 850/900/1800/1900MHz GPRS: UL 85,6 kBit/s; DL 107 kBit/s GSM: UL 236,8 kBit/s; DL 296 kBit/ LTE-M1: Max. 375Kbps (DL), max. 375Kbps (UL) LTE-NB: Max. 32Kbps (DL), max. 70Kbps (UL) |
| Recommended antenna | TC ANT MOBILE WALL 0.5M - 2702274 |
| Max. length of the antenna cable | < 3 m |
| Max. output power | GSM850/EGSM900: 33dBm DCS1800/PCS1900: 30dBm LTE: 23dBm |

WiFi

| | |
|--------------------|------------------------------------------------------------------------------------------------------------------|
| Standards | IEEE 802.11b/g/n |
| Frequency bands | 2.4 GHz Kanäle 1-13 (2.412 GHz - 2.472) |
| Channel band width | 20 MHz |
| Data rate | 802.11b1, 2, 5.5 and 11 Mbps 802.11g 6, 9, 12, 18, 24, 36, 48 and 54 Mbps 802.11n MCS0-MCS7 (max 72.2Mbps) |
| max. output power: | 19 dBm EIR |

LED indications

| | |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Service | blue: system is starting green: system started, not ready for operation yet flashing green: system running, system ready for operation red: system error |
| Ethernet (terminals B, C) | off: no Ethernet connection steady green: active Ethernet connection flashing green: data exchange steady yellow: transmission rate 100 Mbit/s yellow off: transmission rate 10 Mbit/s |

Data interface

| | |
|----------------------------------------------|--------------------------------------|
| USB host 1 (terminal D1) | USB port type A; USB 2.0 max. 250 mA |
| USB host 2 (terminal D2) | USB port type A; USB 2.0 max. 250 mA |
| Ethernet (terminal B, C) | 10/100 Mbit |
| CONFIG (configuration interface, terminal H) | USB port type B |
| SIM card (only with 4G modem, terminal E) | micro SIM |
| Modbus meter (terminal A) | 9.6 kBit |
| Control Pilot (terminal A (CP)) | acc. to IEC 61851 |
| Proximity Pilot (terminal A (PP)) | acc. to IEC 61851 |

Technical data

Inputs

Optocoupler 1 (terminal L (Opto 1 In+, Opto 1 In-))

| | |
|----------------------|--------------------|
| Input voltage (HIGH) | DC 11.4 V...25.2 V |
| Input voltage (LOW) | DC 0 V |
| Input current | 2.3 mA...6.4 mA |

Optocoupler 2 (terminal L (Opto 2 In+, Opto 2 In-))

| | |
|----------------------|--------------------|
| Input voltage (HIGH) | DC 11.4 V...25.2 V |
| Input voltage (LOW) | DC 0 V |
| Input current | 2.3 mA...6.4 mA |

Weld check (terminal M (WB, WA))

| | |
|---------------|------------------|
| Input voltage | AC 184 V...264 V |
| Input current | 0.6 mA...1.3 mA |

Input PE (terminal A (PE, PE))

Outputs

Contact data acc. to IEC 60947-5-1:

DC 12 V voltage source (terminal A (12 V, 0 V))

| | |
|-----------------------|----------------|
| Output voltage | DC 12 V |
| maximum load capacity | 0,4 A / 4,8 VA |
| Tolerance | DC \pm 0,6 V |

Relay 1 (12 V) (terminal K (relay 13, relay 14))

| | |
|---------------------------------|---------------------|
| Rated operational voltage U_e | DC 24 V |
| Rated operational current I_e | DC 1 A |
| Minimum contact rating | 1 mA at \geq 10 V |

Relay 2 (12 V) (terminal K (relay 23, relay 24))

| | |
|---------------------------------|---------------------|
| Rated operational voltage U_e | DC 24 V |
| Rated operational current I_e | DC 1 A |
| Minimum contact rating | 1 mA at \geq 10 V |

Switching contact for contactor (terminal M (relay 33, relay 34))

| | |
|---------------------------------|---------------------------|
| Rated operational voltage U_e | AC 230 V |
| Rated operational current I_e | AC 4 A |
| Minimum contact rating | 50 mA at \geq 10 V (AC) |

Environment/EMC

| | |
|-----------------------|--------------------|
| EMC | see CE declaration |
| Operating temperature | -25...+65 °C |

Classification of climatic conditions acc. to IEC 60721:

| | |
|-----------------------------------|-------------------------------------------------|
| Stationary use (IEC 60721-3-3) | 3K23 (except condensation and formation of ice) |
| Transport (IEC 60721-3-2) | 2K11 |
| Long-term storage (IEC 60721-3-1) | 1K21 |

Classification of mechanical conditions acc. to IEC 60721:

| | |
|-----------------------------------|------|
| Stationary use (IEC 60721-3-3) | 3M11 |
| Transport (IEC 60721-3-2) | 2M4 |
| Long-term storage (IEC 60721-3-1) | 1M12 |

Cable lengths/cable types

Ethernet (terminals B, C)

| | |
|------------------------------|--------------------------------------------------------------|
| Cable | shielded on one side, shield on charge controller side to PE |
| Connection cable | CAT 6 |
| Max. connection cable length | 100 m |

Connection type (terminal blocks A, K and L)

push-wire terminal

| | |
|----------------------------------------------|------------------------------------------------------------|
| Connection specifications: | |
| rigid /flexible | 0.2 mm ² ...1.5 mm ² (AWG 24...16) |
| flexible with ferrule without plastic sleeve | 0.25 mm ² ...1.5 mm ² (AWG 24...16) |
| flexible with ferrule with plastic sleeve | 0.14 mm ² ...0.75 mm ² (AWG 26...18) |
| Stripping length | 10 mm |
| Max. connection cable length | < 3 m |
| Cable (Modbus) | shielded and twisted in pairs, shield on both sides to PE |
| Max. connection cable length (Modbus) | 250 m |
| Cross section (Modbus) | \geq 0.5 mm ² |
| Max. connection cable length (PE) | < 3 m |
| Cross-section (PE) | \geq 1 mm ² |

Connection type (terminal block M)

push-wire terminal

| | |
|----------------------------------------------|-----------------------------------------------------------|
| Connection specifications: | |
| rigid /flexible | 0.75 mm ² ...2.5 mm ² (AWG 24...16) |
| flexible with ferrule without plastic sleeve | 0.75 mm ² ...2.5 mm ² (AWG 24...16) |
| flexible with ferrule with plastic sleeve | 0.75 mm ² ...2.5 mm ² (AWG 24...18) |
| Stripping length | 10 mm |
| Max. connection cable length | < 3 m |

Connection type (terminal block N)

push-wire terminal

| | |
|----------------------------------------------|-----------------------------------------------------------|
| Connection specifications: | |
| rigid /flexible | 0.2 mm ² ...2.5 mm ² (AWG 24...12) |
| flexible with ferrule without plastic sleeve | 0.25 mm ² ...2.5 mm ² (AWG 24...12) |
| flexible with ferrule with plastic sleeve | 0.25 mm ² ...2.5 mm ² (AWG 24...12) |
| Stripping length | 10 mm |

Other

| | |
|----------------------|---------------------------------|
| Operating mode | continuous operation |
| Mounting position | standing |
| Degree of protection | IP20 |
| Documentation number | D00436 |
| Weight | max. 500 g (depends on variant) |

Ordering information

| Interface | 4G modem | WiFi | PLC ¹⁾ | Insulated input | 12 V relay output | Type | Art. No. |
|-----------------------------------|-------------------|------|-------------------|-----------------|-------------------|----------------------|-----------|
| USB, Modbus meter, Ethernet, RFID | ■ (Cat 1) | ■ | ■ | 2x | 2x | ICC1324-Connect Plus | B94060080 |
| | ■ (Cat M1/NB1) | – | ■ | 1x | – | ICC1324-Connect | B94060079 |
| | – | ■ | ■ | 1x | 1x | ICC1324-Connect SP | B94060074 |
| | – | ■ | ■ | 1x | – | ICC1324-Home Plus | B94060078 |
| USB | – | – | – | 1x | – | ICC1324-Home | B94060077 |

¹⁾ Powerline Communication acc. ISO/IEC 15118

i The charge controller with residual direct current monitoring module (RDC-M) only works in combination with the measuring current transformer (to be ordered separately). Different cable lengths are available.

Accessory

| Description | Art. No. | Plug kit | Content / Quantity | Art. No. |
|-------------------------------------------------------------------------------|-----------|-----------------------------------------------------|----------------------------------------------|-----------|
| HMI150 | B94060150 | Plug kit (can be ordered separately) | 2-pole (1 x), 4-pole (1 x), 8-pole (3 x) | B94060125 |
| HMI145 | B94060151 | | | |
| HMI140 | B94060152 | Plug kit bulk pack Connect Plus, Connect, Home Plus | 2-pole (50 x), 4-pole (50 x), 8-pole (150 x) | B94060124 |
| Current transformer CTBC17 (cable variant, cable length 325 mm) ¹⁾ | B98080071 | | | |
| Current transformer CTBC17 (PCB variant) ^{1), 2)} | B98080070 | Plug kit bulk pack Home | 2-pole (50 x), 4-pole (50 x), 8-pole (100 x) | B94060123 |
| Connection cable CTBC17-Cable1470 incl. clip housing (cable length 1470 mm) | B98080542 | | | |
| Connection cable CTBC17-Cable600 incl. clip housing (cable length 600 mm) | B98080543 | | | |
| Connection cable CTBC17-Cable325 incl. clip housing (cable length 325 mm) | B98080541 | | | |
| Connection cable CTBC17-Cable180 incl. clip housing (cable length 180 mm) | B98080540 | | | |

¹⁾ Internal diameter: 17 mm

²⁾ The PCB-variant can be combined with the connection cables of different lengths



Bender GmbH & Co. KG

Londorfer Straße 65 • 35305 Grünberg • Germany
Tel.: +49 6401 807-0 • info@bender.de • www.bender.de



BENDER Group