

- -011

- -011

- -011

( )

( )

( )

- -011

: ; ( ) - ,

- -011

( )

( )

-011 ( . 1 ).

- 1, 2 5, -011

- -011 1

40 ( . 1 , 1 , 1 ). ( ) 25

- -011 2 ( . 2 , 2 )

( . 2 ), -011 2

- -011 2

, « »



1



1



1



1



2



2



2

( .3)

10

-011

5



3

-011

RS-232.

HART,

2.

1,

RS-485.


-011

4.

( )

-011

( , ).

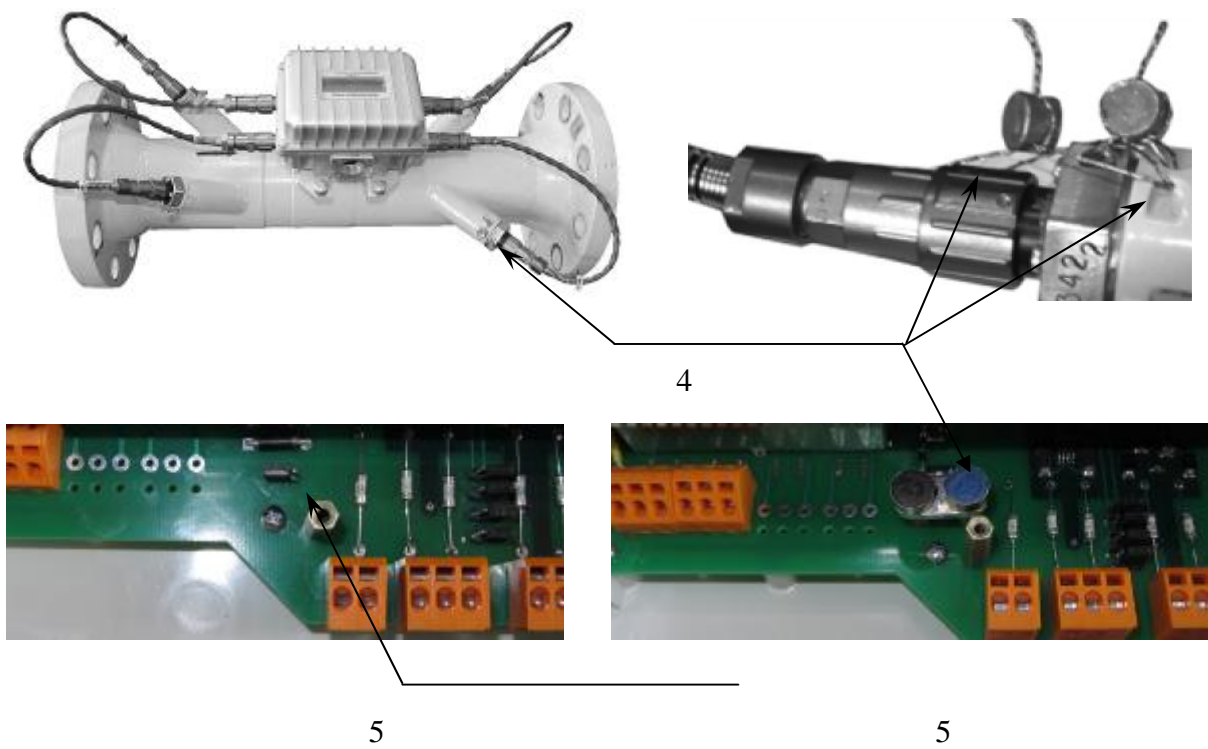

« »  
-011  
« »,  
3286-2010.

( . 5 )  
-011  
1.

		( )	( )	
-	UVR-011V30	V30	A94A	CRC16
« »	636128.050-05	V03	F42A	CRC16

-011 2.

2

	-		
1	2	3	4
	1	2	5
-	25 ÷ 200	25 ÷ 1600	100 ÷ 1400
-	80 ÷ 3000	300 ÷ 7000	-
-	-	50 ÷ 3000	-
	1,5 - 30		
	0,07 ÷ 10	0,1 ÷ 10	1 ÷ 10
$Q_1, \text{ }^3/$	$198 \cdot D^2$	$282,7 \cdot D^2$	$282,7 \cdot D^2$
$Q_2, \text{ }^3/$	: $(0,3/D) \cdot Q_1$ $D < 0,3$ $Q_1$ $D \geq 0,3$	: $(0,4/D) \cdot Q_1$ $D < 0,4$ $Q_1$ $D \geq 0,4$ : $(0,83/D) \cdot Q_1$ $D < 0,83$ $Q_1$ $D \geq 0,83$	$5 \cdot Q_1$
$Q_3, \text{ }^3/$	$143 \cdot Q_1$	$100 \cdot Q_1$	$100 \cdot Q_1$
-	$\pm 4$	$\pm 4$	$\pm 0,25$
-	$\pm 1$	$\pm 1 -$ $\pm 1,5 -$	$\pm 0,15$
	-	$\pm 0,5$	-
-	$10^\circ, /$		
-	$\pm 0,02$ $\pm 0,01$		
	$\pm 2$	$\pm 2$	$\pm 2$
	$\pm 0,5$	$\pm 0,5$	-
	1	1 2	-
	$4 \div 20$	$0 \div 5$ $4 \div 20$	-

D -

2

1	2	3	4
RS-232,	- 2400 - 1200	9600	19200
-	4	7 25	25
-	187 ÷ 242 : 11 ÷ 14 : 3,6 6 ÷ 9	187 ÷ 242 11 ÷ 14 6	187 ÷ 242 -
-	10	170	10
-	1200	300	100
( ) RS-232,	25		
RS-485,	-	1200	-
-	5	50 ° ,	80 %
-	50	50 ° ,	95%
-	60	50 ° ,	95 %
-	20	120 ° ,	100 %
-	20	150 ° ,	100 %
( 14254-96)	- IP56 - IP20	- IP56 - IP68	- IP68 - IP56
-	-	- IP45	-
-	-	IP67, IP68	-
-	1ExibII T4 [Exib]II 1ExibII T4	[Exib]IIB [Exib]IIB 1ExibIIBT4	1ExibIIAT4 [Exib]IIB 1ExibIIAT4
-	145×85×60	. 290×245×125	200×140×120
-	140×90×60	. 235×110×65	215×160×105
-	-	215×160×105 65×40×40	-
,	15		

( )

- :  
- -011 1 ;  
- 1 ;  
- 1 ;  
- 1 ;  
- 1 ;  
- 1 .

1845-2012 « . -  
-011. », « - »  
22 2012 .

- :  
- , = ±0,05 %;  
- 5 2 7502-98;  
- , 2 11197, 0,5°;  
- , 2;  
- 551, (0 ÷ 1000) , = ±0,05 ;  
- -93 , = ±0,2 ;  
- 7-40, = ±0,1 % ,  
- 1-127, 0 ÷ 20 ;  
- - 3-63, = ±5·10<sup>-7</sup>+1 . ;  
- -2 -2-010 « » 4282 , = ±1 ;  
- 4100/3 500 ;  
- -011 , 636128.050-05 ;  
- - , 011.636128.047 3;  
- .392.00.00.000.

-  
-011 ,  
28723-90 « , .  
».  
4213-216-83603664-001-2012 « - -011.  
».

« , ,  
308015, . ,  
, 49

« » ( « - »)  
30010-10 15.05.2010 .  
., 31,  
: 117418,  
.: +7 (495) 544 00 00

..  
.. «\_\_\_»\_\_\_\_\_2013 .