



# STICK-TYPE THERMO ANEMOMETER MODEL: 360

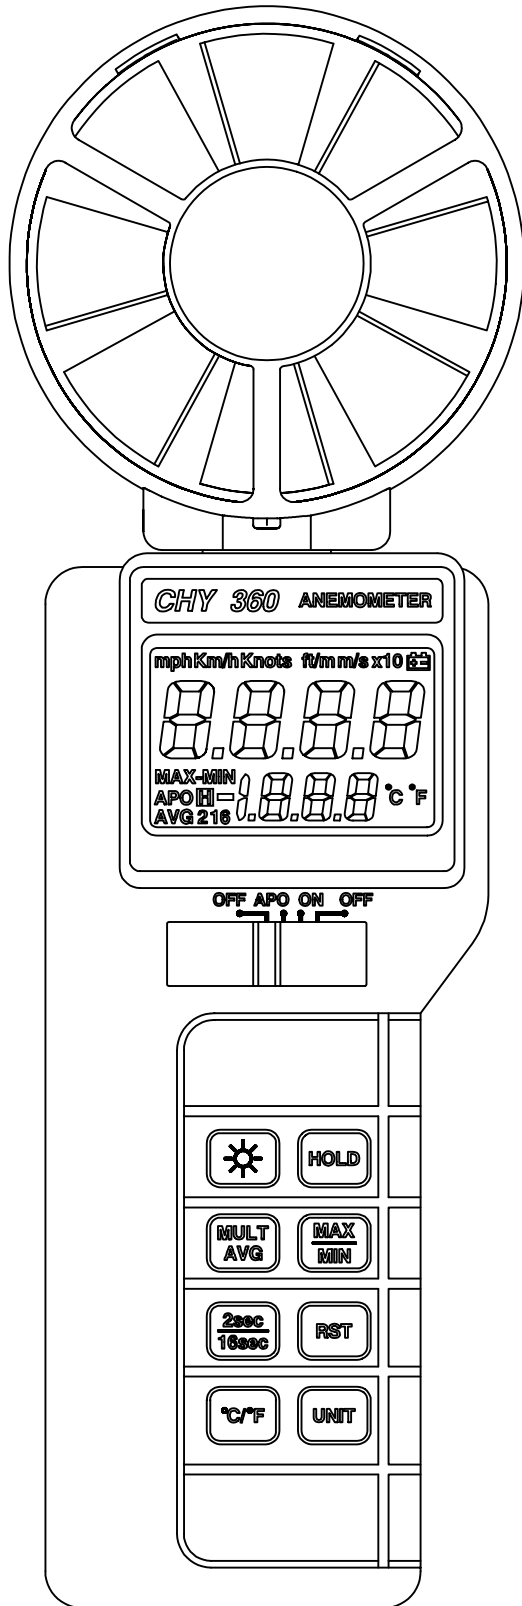

## FEATURES:

- CE-Mark Approval.
- Portability and simplicity one hand operation.
- Use ball bearing.
- Display Back-Light feature.
- DATA HOLD function.
- Average reading up to 8 points measurement.
- Memory MIN / MAX / AVERAGE.
- Moving 2/16 second average with MIN / MAX / AVERAGE.
- Measurement units: KNOTS, MPH, KPH, m/sec, ft / min.
- Use highly accurate NTC temperature sensor.
- Hand-Held lightweight design.
- Auto power off function.

## SPECIFICATIONS

- Display: 4 digit liquid crystal display (LCD).
- Polarity: Automatic, positive implied, negative polarity indication.
- Zero: Automatic.
- Low battery indication: the "  " is displayed when the battery voltage drops below the operating level.
- Operating environment: 0°C to 50°C at <75% relative humidity.
- Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.
- Accuracy: Stated accuracy at 23°C ± 5°C, <75% relative humidity.
- Dimensions: 228mm(H) x 65.5mm(W) x 35mm(D).
- Weight: 330g (including probe and batteries)
- Weight: approx. 9 oz. (211g) including battery.

## WIND VELOCITY

| Units  | Resolution | Threshold | Range     |
|--------|------------|-----------|-----------|
| m/s    | 0.01       | 0.3       | 0.0-30.0  |
| ft/min | 1          | 60        | 0.0-5900  |
| knots  | 0.1        | 0.6       | 0.0-58.0  |
| mph    | 0.1        | 0.7       | 0.0-67.0  |
| Km/h   | 0.1        | 1.1       | 0.0-108.0 |

Accuracy: ±3%FS

## TEMPERATURE

- Sensor: Thermistor temperature sensor
- Range: -20°C to 60°C  
-4°F to 140°F
- Resolution: 0.1°C / 0.1°F
- Accuracy: ±0.5°C 0°C to 45°C  
±1°C -20°C to 0°C, 45°C to 60°C  
±1°F 32°F to 113°F  
±2°F -4°F to 32°F, 113°F to 140°F

**CHY FIREMATE CO., LTD.**

NO.3, SHENGLI 1<sup>ST</sup> ST., XINTIAN VILLAGE, RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: [chy@chy-meter.com](mailto:chy@chy-meter.com)