


STICK-TYPE MOISTURE METER MODEL: 690

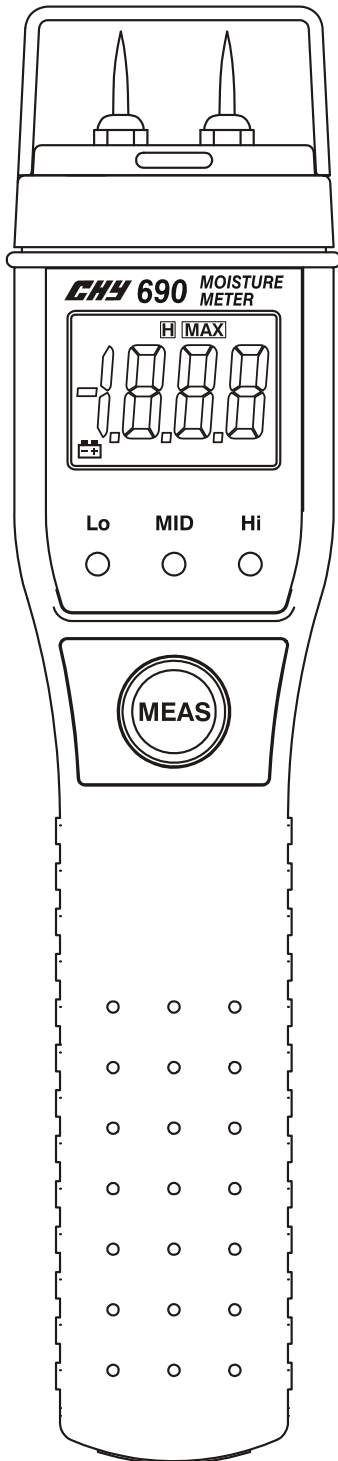

ACTUAL SIZE

FEATURES:

- CE-Mark Approval.
- According EN50081-1(97).
- According EN50082-1(97).
- Portability and simplicity one hand operation.
- Automatic power shut off for maximum battery life.
- Jack socket for pin extension leads.
- Three lights to indicate moisture content in wood:
 - Green: "Air, dry" conditions.
 - Yellow: Slightly in excess of normal.
 - Red: Excess moisture.
- Hand-Held lightweight design.
- Measuring principle is electrical resistance.

SPECIFICATIONS

- Display: 3 1/2 digit liquid crystal display .
- Range: 10%~28%
- (Reading above 28 indicate increasing levels of high moisture are not percent moisture content.)
- Low battery indication: the "🔋" is displayed when the battery voltage drops below the operating level.
- Operating environment: 0°C to 50°C, 15% to 80% relative humidity.
- Storage environment: -20°C to 60°C, 0% to 80% relative humidity with battery removed from meter.
- Accuracy: $\pm 2.0\%$.
- Stated accuracy at 23°C $\pm 5^\circ\text{C}$, <75% relative humidity.
- Dimensions: 193mm(H) x 44mm(W) x 40mm(D).
- Weight: approx. 5.6 oz. (150g) including battery. (1.5VX4pcs AAA size).

CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1ST ST., XINTIAN VILLAGE,
RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: chy@chy-meter.com