


ANEMOMETER MODEL: 260

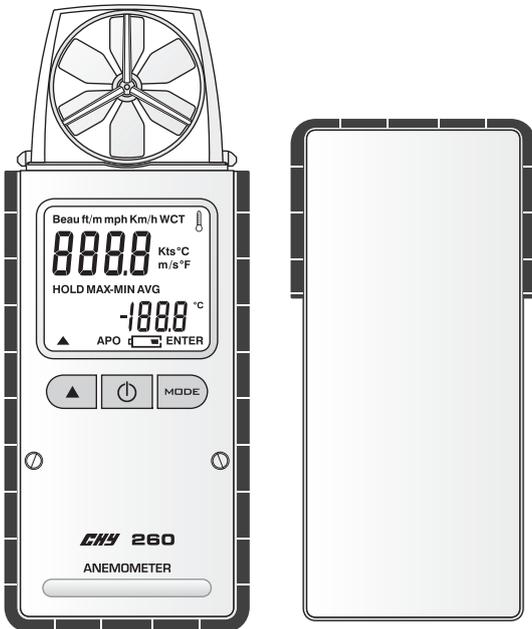

FEATURES

Built-in accurate NTC temperature.
MAX/MIN/AVG and HOLD functions.
Auto-power off.
Backlight function.
Protective cap for safe storage.
Attached with carrying strap.

Storage temperature:

-20°C to 60°C (-4°F to 140°F), 0 to 80% R.H. with battery removed from meter.

Low battery indication:

The “” is displayed when the battery voltage drops below the operating level.

Battery:

1.5Vx2pcs AAA size.

Dimensions:

24.7mm(T) x 50.9mm(W) x 132.9mm(H).

Weight:

Approx. 116g including batteries.

SPECIFICATIONS

Operating environment: -20°C to 60°C (32°F to 122°F) at <70% R.H.

Measurement rate: 1 time/second.

WIND VELOCITY

Ranges: 0.4 to 20 m/s, 80 to 4000 ft/m

Resolution: 0.1 m/s, 1ft/m

Accuracy: Stated accuracy at 23°C±5°C (73.4°F±9°F), <70% R.H.

±0.2 m/s + 2% of reading

±40 ft/m + 2% of reading

Temperature Coefficient: 0.1 times the applicable accuracy specification per °C out of 18°C to 28°C (64°F to 82°F).

AIR TEMPERATURE

Range: -20°C to 60°C, -4°F to 140°F

Resolution: 0.1°C, 0.1°F

Accuracy: Stated accuracy at 23°C±5°C (73.4°F±9°F), <70% R.H.

±0.5°C for 0°C to 45°C

±1.0°C for -20°C to 0°C, 45°C to 60°C

±1.0°F for 32°F to 113°F

±2.0°F for -4°F to 32°F, 113°F to 140°F

Temperature Coefficient: 0.1 times the applicable accuracy specification per °C out of 18°C to 28°C (64°F to 82°F).

CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1st ST., XINTIAN VILLAGE,
RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: chy@chy-meter.com