




leader in **dry steam** technology

# Steam master

## 36 - 54 - 72 kW

INDUSTRIAL  
STEAM GENERATOR

- Food industry
- Beverage & wine making
- Transportations
- Industry

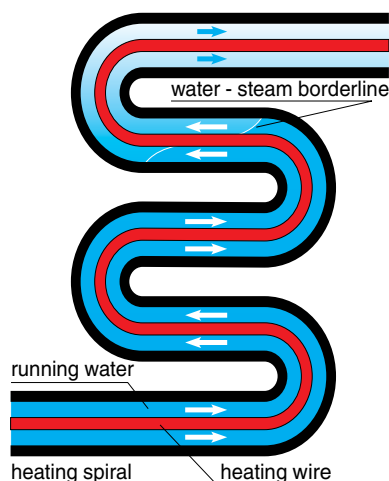

### Patented heating coil system

Water runs through the heating spiral and is heated up by a wire. Before leaving the heating spiral, the water turns to steam and is pumped to the consumer. This system optimizes the steam output with the minimum power consumption.

Designed to work with Tekno belt cleaner

For correct voltage and order code please contact our technical office.

	measure units	36 KW	54 KW	72 KW
start up time	min	2	2	2
heating system	type	coil	coil	coil
coil material	type	inox	inox	inox
coil power	kW	36	54	72
coil temperature regulation	yes/no	yes	yes	yes
steam production	lt/min	dry 0,8 wet 1,6	dry 1,2 wet 2,4	dry 1,6 wet 3,2
steam output regulation	type	by PLC	by PLC	by PLC
working pressure	bar/psi	11/160	11/160	11/160
steam temperature	°C/°F	175/350	175/350	175/350
exits	number	1 or 2	1 or 2	1 or 2
water output regulation	yes/no	yes	yes	yes
detergent output	yes/no	no	yes	yes
softner cartridge	Yes/no	Yes	yes	Yes
softner capacity	liter	5000	5000	5000
water tank capacity	liter/gallon	100/27	100/27	100/27
unlimited autonomy	yes/no	yes	yes	yes
detergent tank capacity	liter/gallon	5/1.32	5/1.32	5/1.32
machine body material	type	inox	inox	inox
machine dimension	l x p x h cm	203 x 90 x 110	203 x 90 x 110	203 x 90 x 110
weight net	kg/lbs	350/771	350/771	350/771

### General Vapeur S.R.L.

Headquarters: Strada per Castelletto 19/21 - 20080 Albairate (MI) - Italy  
 Phone: +39.02.94981104 • Fax: +39.02.94981134  
 infoclienti@menikini.com • www.menikini.com • C.S. € 1.800.000

**menikini**<sup>®</sup>  
 industrial sanitizing  
 with ecological dry steam

industrial sanitizing